


Luminaire Property

Luminaire Description: Round or Square 36W Ceiling Lights	Voltage: 220.1 V
Luminaire Categorie:	Current: 0.155 A
Lamp Categorie:	Power: 33.05 W
Lamp Description:	Power Factor: 0.968
Number of Lamp:	Test Lab:
Lamp Lumens(lm): 3811.53	Photometric Type: Type C
Luminous Length(m):	
Luminous Width(m):	
Luminous Height(m):	

Photometric Results

CIE Class: Direct	Max.Intensity Angle: C:180.0 G:1.0
Measurement Flux: 3811.53 lm	Beam Angle(50%Imax): 102.2, 98.75
Efficiency: 115.3262 lm/W	Luminaire Efficacy Rating(LER) : 100.00%
Central Intensity: 1483.62cd	Upward Ratio: 0.0%
Max. Intensity: 1488.348cd	Downward Ratio: 100.0%
Field Angle(10%Imax): 152.45, 149.63	

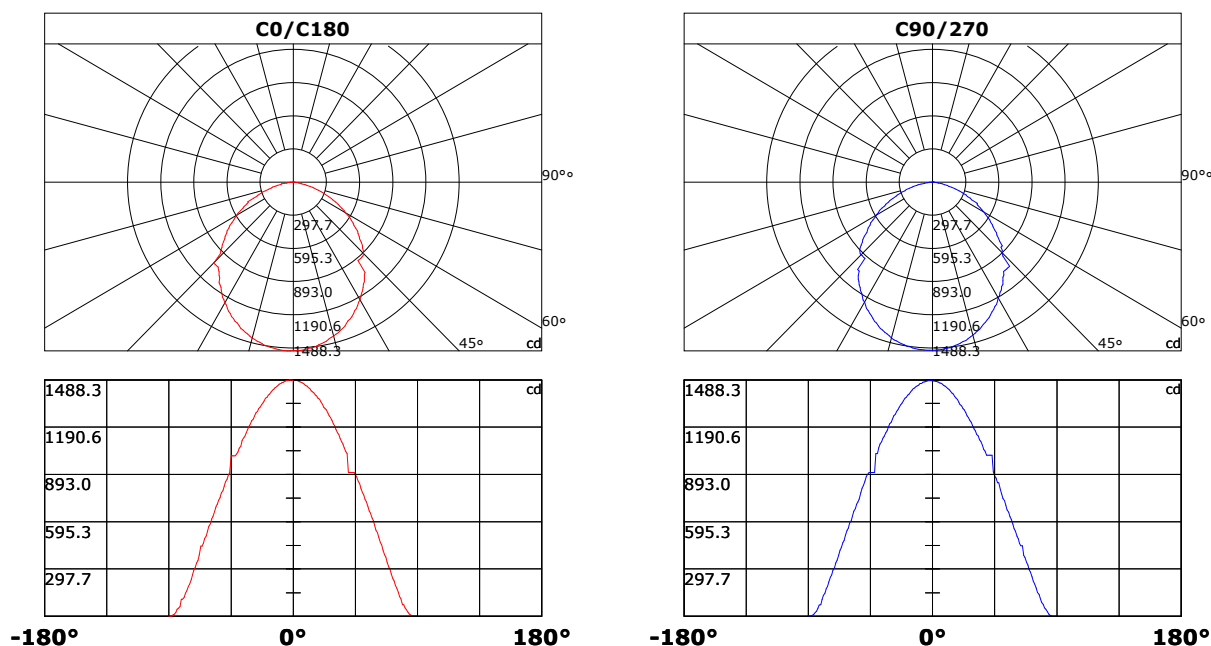

Light intensity data Unit[cd]


C\G	G0.0	G1.0	G2.0	G3.0	G4.0	G5.0	G6.0	G7.0	G8.0	G9.0
C0.0	1483.6	1486.9	1485.8	1483.0	1479.1	1476.2	1470.8	1468.0	1460.8	1453.7
C45.0	1483.6	1476.9	1473.7	1471.9	1466.9	1461.2	1458.0	1446.9	1442.2	1437.6
C90.0	1483.6	1481.2	1479.8	1477.3	1474.8	1470.1	1467.6	1461.2	1454.0	1450.1
C135.0	1483.6	1480.5	1478.7	1474.8	1472.3	1467.6	1460.8	1457.2	1449.4	1445.1
C180.0	1483.6	1488.3	1487.6	1486.9	1484.4	1482.6	1479.1	1474.0	1471.2	1465.5
C225.0	1483.6	1480.5	1480.8	1481.2	1480.1	1480.1	1478.3	1475.5	1471.9	1467.2
C270.0	1483.6	1483.7	1483.3	1482.3	1481.2	1478.7	1475.1	1473.3	1465.5	1465.5
C315.0	1483.6	1484.8	1485.1	1484.8	1484.8	1482.6	1480.5	1478.7	1474.8	1469.4
C360.0	1483.6	1486.9	1485.8	1483.0	1479.1	1476.2	1470.8	1468.0	1460.8	1453.7
C\G	G10.0	G11.0	G12.0	G13.0	G14.0	G15.0	G16.0	G17.0	G18.0	G19.0
C0.0	1449.0	1440.1	1434.7	1418.6	1412.9	1406.8	1393.9	1387.1	1373.2	1365.7
C45.0	1427.9	1416.8	1411.5	1399.7	1387.1	1380.0	1366.4	1351.4	1343.5	1327.8
C90.0	1441.5	1432.6	1427.2	1416.1	1404.7	1398.2	1385.0	1371.4	1364.3	1349.2
C135.0	1435.8	1425.4	1420.0	1407.9	1401.8	1388.9	1382.1	1368.2	1353.2	1344.2
C180.0	1461.5	1453.7	1445.1	1439.7	1429.3	1423.6	1412.2	1399.7	1393.2	1379.6
C225.0	1464.4	1457.2	1454.0	1446.2	1437.6	1432.6	1422.2	1417.2	1405.7	1393.2
C270.0	1455.1	1451.5	1446.9	1438.3	1432.9	1422.9	1411.1	1398.9	1392.5	1379.3
C315.0	1466.2	1459.0	1451.9	1447.2	1438.3	1428.6	1423.3	1411.8	1405.4	1392.2
C360.0	1449.0	1440.1	1434.7	1418.6	1412.9	1406.8	1393.9	1387.1	1373.2	1365.7
C\G	G20.0	G21.0	G22.0	G23.0	G24.0	G25.0	G26.0	G27.0	G28.0	G29.0
C0.0	1350.7	1333.9	1317.4	1308.5	1299.5	1279.9	1260.6	1250.9	1230.5	1210.1
C45.0	1319.6	1302.4	1284.2	1275.2	1255.9	1246.3	1226.2	1214.8	1194.0	1172.2
C90.0	1333.1	1324.6	1308.5	1299.2	1281.3	1261.3	1251.3	1231.6	1221.6	1200.5
C135.0	1328.1	1311.0	1293.5	1284.2	1264.8	1255.5	1235.5	1215.1	1204.8	1183.7
C180.0	1372.5	1357.5	1341.7	1333.5	1316.7	1307.8	1289.5	1280.2	1260.9	1240.9
C225.0	1386.8	1373.2	1358.2	1350.7	1343.2	1318.5	1309.9	1292.0	1273.4	1262.7
C270.0	1372.5	1357.8	1341.7	1333.5	1316.3	1299.2	1290.2	1271.6	1262.0	1242.3
C315.0	1378.9	1371.4	1356.4	1348.5	1332.8	1315.3	1307.0	1288.8	1279.9	1260.6
C360.0	1350.7	1333.9	1317.4	1308.5	1299.5	1279.9	1260.6	1250.9	1230.5	1210.1
C\G	G30.0	G31.0	G32.0	G33.0	G34.0	G35.0	G36.0	G37.0	G38.0	G39.0
C0.0	1199.4	1177.9	1155.4	1144.0	1121.1	1097.8	1085.7	1061.0	1036.0	1023.8
C45.0	1161.1	1139.0	1127.9	1104.3	1080.7	1068.9	1044.6	1031.7	902.6	902.6
C90.0	1179.4	1167.9	1145.8	1134.7	1111.8	1100.0	1076.0	1051.4	1039.2	1014.2
C135.0	1161.5	1150.4	1127.5	1116.1	1092.5	1068.5	1056.0	1031.3	1018.8	913.3
C180.0	1230.9	1210.1	1198.3	1176.5	1154.3	1131.8	1120.0	1107.5	1071.0	1058.9
C225.0	1243.7	1223.7	1213.4	1192.3	1181.5	1159.4	1147.9	1124.7	1101.8	1090.0
C270.0	1221.9	1211.6	1189.0	1167.2	1155.8	1133.2	1121.1	1097.8	1085.7	1061.0
C315.0	1240.9	1230.9	1210.5	1199.8	1178.3	1166.9	1144.3	1119.7	1109.3	1083.9
C360.0	1199.4	1177.9	1155.4	1144.0	1121.1	1097.8	1085.7	1061.0	1036.0	1023.8

Light intensity data Unit[cd]

C\G	G40.0	G41.0	G42.0	G43.0	G44.0	G45.0	G46.0	G47.0	G48.0	G49.0
C0.0	904.7	904.7	904.7	904.7	904.7	891.5	877.6	849.7	835.7	807.1
C45.0	902.6	902.6	902.6	902.6	874.0	846.8	832.9	805.0	776.7	736.3
C90.0	1014.2	1014.2	1014.2	1014.2	909.0	882.2	868.3	841.4	841.4	799.2
C135.0	913.3	913.3	913.3	899.7	886.5	872.6	845.0	817.1	802.8	774.6
C180.0	1034.2	1021.3	1008.8	1008.8	1008.8	1008.8	903.3	889.7	862.5	846.1
C225.0	1065.3	1053.1	1041.0	1016.0	1016.0	1016.0	1016.0	1016.0	911.5	882.2
C270.0	1024.2	1024.2	906.2	906.2	906.2	906.2	906.2	892.2	878.6	850.4
C315.0	1059.6	1047.1	1022.4	1009.2	1009.2	1009.2	1009.2	1009.2	890.4	862.5
C360.0	904.7	904.7	904.7	904.7	904.7	891.5	877.6	849.7	835.7	807.1
C\G	G50.0	G51.0	G52.0	G53.0	G54.0	G55.0	G56.0	G57.0	G58.0	G59.0
C0.0	778.9	764.2	736.3	722.0	692.7	663.0	648.7	619.0	604.0	573.6
C45.0	734.5	705.6	691.2	661.9	647.3	617.9	603.3	573.2	543.2	528.2
C90.0	771.0	742.4	728.1	699.1	670.1	655.8	626.5	611.5	581.8	551.8
C135.0	737.7	732.0	703.4	688.7	659.4	629.7	613.3	583.3	553.2	538.2
C180.0	818.2	789.6	775.6	746.7	732.4	703.4	688.7	658.7	629.0	613.6
C225.0	855.0	840.7	812.5	798.2	770.3	741.3	712.3	697.3	668.0	638.0
C270.0	822.5	806.8	778.1	737.4	720.6	705.9	676.6	661.6	632.2	601.1
C315.0	849.0	820.7	806.4	777.8	749.2	732.7	703.8	689.1	659.4	629.0
C360.0	778.9	764.2	736.3	722.0	692.7	663.0	648.7	619.0	604.0	573.6
C\G	G60.0	G61.0	G62.0	G63.0	G64.0	G65.0	G66.0	G67.0	G68.0	G69.0
C0.0	542.8	527.1	495.3	464.5	449.2	418.4	388.0	372.6	341.8	311.4
C45.0	482.4	482.4	451.7	421.3	404.1	373.7	358.7	328.4	313.3	283.2
C90.0	536.4	503.5	488.5	458.1	443.1	443.1	383.7	368.3	338.5	323.2
C135.0	507.8	477.0	461.7	430.9	400.5	385.1	354.9	339.7	309.4	279.1
C180.0	582.9	567.5	536.8	506.0	490.6	459.9	442.7	442.7	384.4	351.5
C225.0	622.9	592.2	562.2	546.8	516.4	500.6	470.2	443.1	443.1	392.6
C270.0	585.8	555.0	540.0	509.2	478.8	463.1	432.3	416.6	385.5	352.8
C315.0	614.0	599.0	568.2	537.5	522.1	491.3	461.0	445.6	443.8	400.9
C360.0	542.8	527.1	495.3	464.5	449.2	418.4	388.0	372.6	341.8	311.4
C\G	G70.0	G71.0	G72.0	G73.0	G74.0	G75.0	G76.0	G77.0	G78.0	G79.0
C0.0	296.1	266.0	235.8	221.2	192.8	178.6	150.9	124.5	111.6	72.5
C45.0	253.3	238.5	209.1	180.6	166.6	139.5	113.7	101.3	73.3	56.5
C90.0	293.2	278.5	249.0	219.5	205.1	177.1	149.9	136.7	111.1	87.3
C135.0	264.2	234.4	219.6	190.8	176.5	147.3	121.1	108.5	72.8	72.8
C180.0	336.3	305.9	290.8	260.3	230.6	201.3	187.1	159.1	145.3	119.2
C225.0	377.3	362.3	316.0	300.6	270.3	255.5	225.5	211.2	182.7	155.0
C270.0	337.3	306.6	291.0	260.7	245.6	216.0	187.0	173.2	145.3	131.8
C315.0	385.1	354.7	323.8	293.1	261.1	246.2	216.4	187.8	173.8	146.4
C360.0	296.1	266.0	235.8	221.2	192.8	178.6	150.9	124.5	111.6	72.5

Light intensity data Unit[cd]

C\G	G80.0	G81.0	G82.0	G83.0	G84.0	G85.0	G86.0	G87.0	G88.0	G89.0
C0.0	72.5	53.1	43.6	27.2	14.3	9.5	3.7	1.5	1.6	1.7
C45.0	46.8	29.8	15.6	10.4	3.9	0.7	0.7	0.7	0.7	0.7
C90.0	74.7	54.0	44.5	28.3	15.0	6.5	3.7	1.2	1.1	1.0
C135.0	52.1	34.1	26.3	13.4	8.4	2.5	0.6	0.6	0.7	0.7
C180.0	106.7	106.7	60.9	51.0	45.0	25.4	12.6	8.0	1.2	1.1
C225.0	141.5	115.9	103.1	79.6	56.8	47.1	44.8	17.2	5.6	1.8
C270.0	105.9	73.1	70.4	49.9	32.0	24.7	13.2	7.1	3.3	1.4
C315.0	133.1	107.9	83.5	61.8	51.6	44.6	26.2	14.3	4.3	1.8
C360.0	72.5	53.1	43.6	27.2	14.3	9.5	3.7	1.5	1.6	1.7
C\G	G90.0									
C0.0	1.8									
C45.0	0.7									
C90.0	0.7									
C135.0	0.7									
C180.0	0.8									
C225.0	1.4									
C270.0	1.4									
C315.0	1.8									
C360.0	1.8									

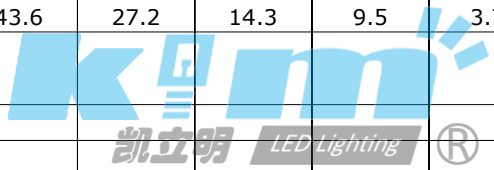


Zonal Luminous Flux Data

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Flux [lm]	Zonal Flux [%]	Sum Flux [%]
0.0	1483.62	0.00	0.00	0.00	0.00
0.0-1.0	1482.85	1.42	1.42	0.04	0.04
1.0-2.0	1481.87	4.26	5.67	0.11	0.15
2.0-3.0	1480.26	7.08	12.76	0.19	0.33
3.0-4.0	1477.93	9.90	22.66	0.26	0.59
4.0-5.0	1474.89	12.70	35.36	0.33	0.93
5.0-6.0	1471.27	15.48	50.85	0.41	1.33
6.0-7.0	1466.85	18.24	69.08	0.48	1.81
7.0-8.0	1461.22	20.96	90.04	0.55	2.36
8.0-9.0	1456.75	23.65	113.69	0.62	2.98
9.0-10.0	1450.17	26.31	139.99	0.69	3.67
10.0-11.0	1442.04	28.90	168.89	0.76	4.43
11.0-12.0	1436.41	31.47	200.36	0.83	5.26
12.0-13.0	1426.71	33.98	234.34	0.89	6.15
13.0-14.0	1418.08	36.41	270.75	0.96	7.10
14.0-15.0	1410.21	38.83	309.58	1.02	8.12
15.0-16.0	1399.53	41.17	350.75	1.08	9.20
16.0-17.0	1388.22	43.41	394.16	1.14	10.34
17.0-18.0	1378.88	45.62	439.78	1.20	11.54
18.0-19.0	1366.41	47.76	487.55	1.25	12.79
19.0-20.0	1355.27	49.81	537.36	1.31	14.10
20.0-21.0	1341.46	51.78	589.14	1.36	15.46
21.0-22.0	1325.19	53.59	642.73	1.41	16.86
22.0-23.0	1316.65	55.43	698.16	1.45	18.32
23.0-24.0	1301.32	57.24	755.40	1.50	19.82
24.0-25.0	1285.45	58.82	814.22	1.54	21.36
25.0-26.0	1271.28	60.35	874.57	1.58	22.95
26.0-27.0	1255.64	61.82	936.39	1.62	24.57
27.0-28.0	1240.89	63.21	999.60	1.66	26.23
28.0-29.0	1221.62	64.43	1064.03	1.69	27.92
29.0-30.0	1204.86	65.51	1129.54	1.72	29.63
30.0-31.0	1188.94	66.62	1196.16	1.75	31.38
31.0-32.0	1170.97	67.61	1263.77	1.77	33.16
32.0-33.0	1154.35	68.50	1332.27	1.80	34.95
33.0-34.0	1134.50	69.27	1401.54	1.82	36.77
34.0-35.0	1115.81	69.89	1471.42	1.83	38.60
35.0-36.0	1099.45	70.53	1541.96	1.85	40.46
36.0-37.0	1078.13	71.02	1612.98	1.86	42.32
37.0-38.0	1045.55	70.89	1683.87	1.86	44.18
38.0-39.0	1018.46	70.45	1754.32	1.85	46.03
39.0-40.0	989.76	70.04	1824.35	1.84	47.86


Zonal Luminous Flux Data

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Flux [lm]	Zonal Flux [%]	Sum Flux [%]
40.0-41.0	985.06	70.32	1894.68	1.84	49.71
41.0-42.0	964.15	70.82	1965.50	1.86	51.57
42.0-43.0	957.66	71.19	2036.69	1.87	53.43
43.0-44.0	939.29	71.60	2108.28	1.88	55.31
44.0-45.0	929.14	71.81	2180.09	1.88	57.20
45.0-46.0	907.29	71.82	2251.91	1.88	59.08
46.0-47.0	890.03	71.48	2323.39	1.88	60.96
47.0-48.0	849.98	70.34	2393.73	1.85	62.80
48.0-49.0	819.81	68.57	2462.30	1.80	64.60
49.0-50.0	795.85	67.36	2529.66	1.77	66.37
50.0-51.0	775.24	66.47	2596.13	1.74	68.11
51.0-52.0	753.96	65.62	2661.75	1.72	69.83
52.0-53.0	728.98	64.51	2726.26	1.69	71.53
53.0-54.0	705.24	63.21	2789.48	1.66	73.19
54.0-55.0	681.24	61.89	2851.37	1.62	74.81
55.0-56.0	659.15	60.57	2911.93	1.59	76.40
56.0-57.0	636.71	59.25	2971.18	1.55	77.95
57.0-58.0	608.87	57.60	3028.78	1.51	79.46
58.0-59.0	584.19	55.78	3084.56	1.46	80.93
59.0-60.0	559.38	54.03	3138.59	1.42	82.34
60.0-61.0	537.97	52.37	3190.95	1.37	83.72
61.0-62.0	513.03	50.64	3241.60	1.33	85.05
62.0-63.0	484.29	48.50	3290.10	1.27	86.32
63.0-64.0	463.10	46.49	3336.59	1.22	87.54
64.0-65.0	441.91	44.79	3381.38	1.18	88.71
65.0-66.0	411.45	42.58	3423.95	1.12	89.83
66.0-67.0	394.63	40.53	3464.49	1.06	90.89
67.0-68.0	369.98	38.73	3503.22	1.02	91.91
68.0-69.0	336.85	36.06	3539.28	0.95	92.86
69.0-70.0	317.85	33.62	3572.90	0.88	93.74
70.0-71.0	293.35	31.59	3604.49	0.83	94.57
71.0-72.0	266.89	29.13	3633.62	0.76	95.33
72.0-73.0	240.86	26.55	3660.17	0.70	96.03
73.0-74.0	218.57	24.15	3684.33	0.63	96.66
74.0-75.0	195.18	21.86	3706.19	0.57	97.24
75.0-76.0	168.95	19.33	3725.52	0.51	97.74
76.0-77.0	150.28	17.02	3742.54	0.45	98.19
77.0-78.0	126.97	14.84	3757.38	0.39	98.58
78.0-79.0	105.17	12.47	3769.85	0.33	98.91
79.0-80.0	91.66	10.61	3780.46	0.28	99.18
80.0-81.0	71.81	8.84	3789.30	0.23	99.42


Iso-Candela [cd]

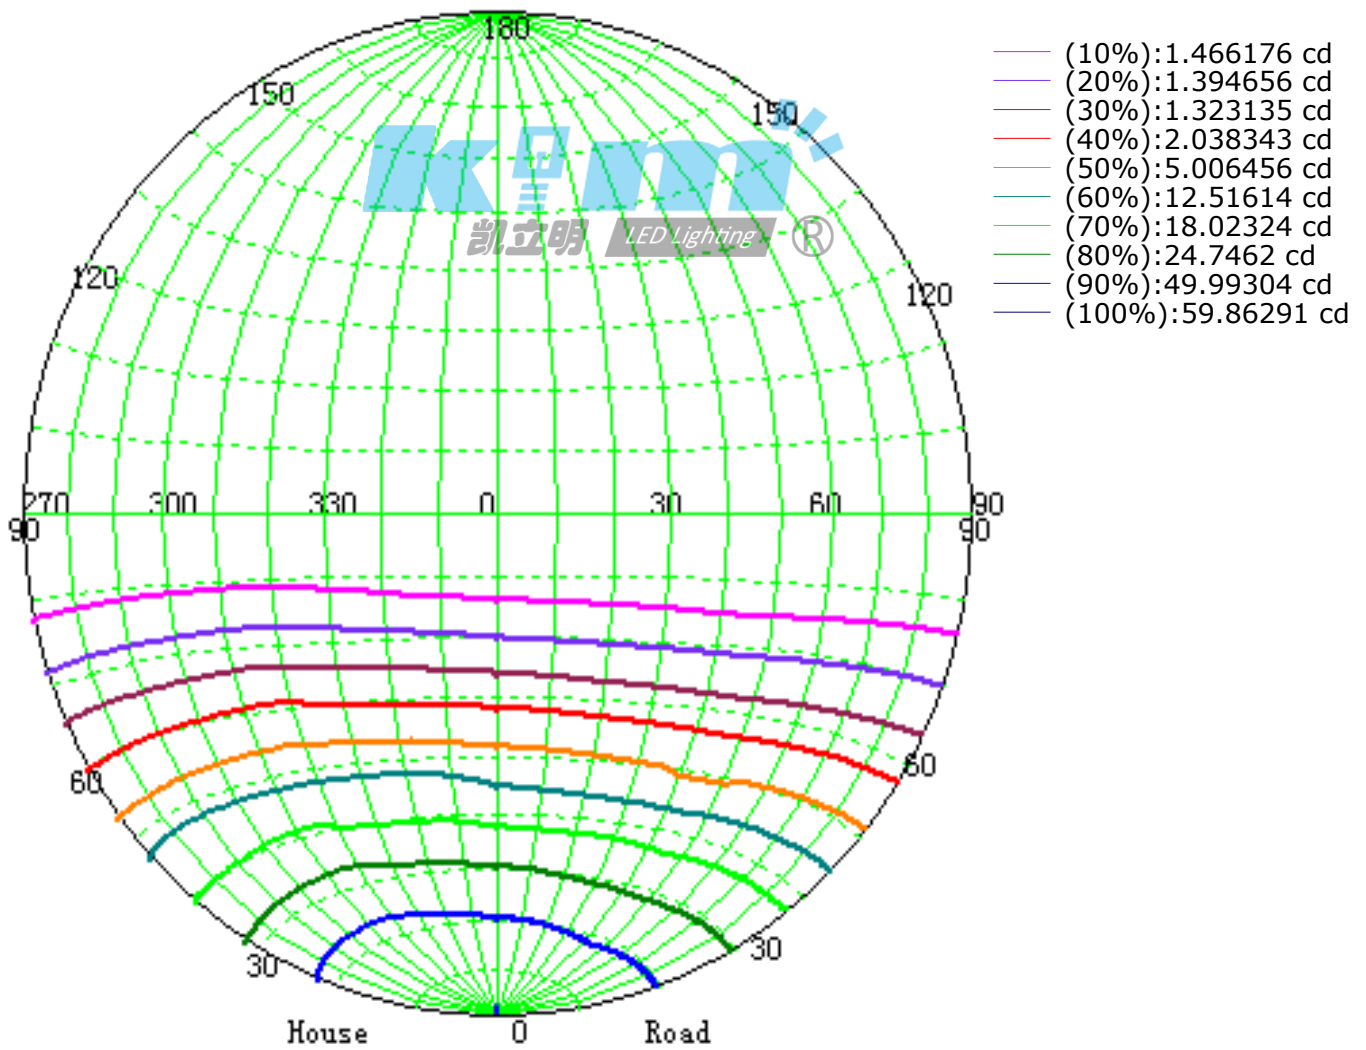

Coefficient Utilization Curve

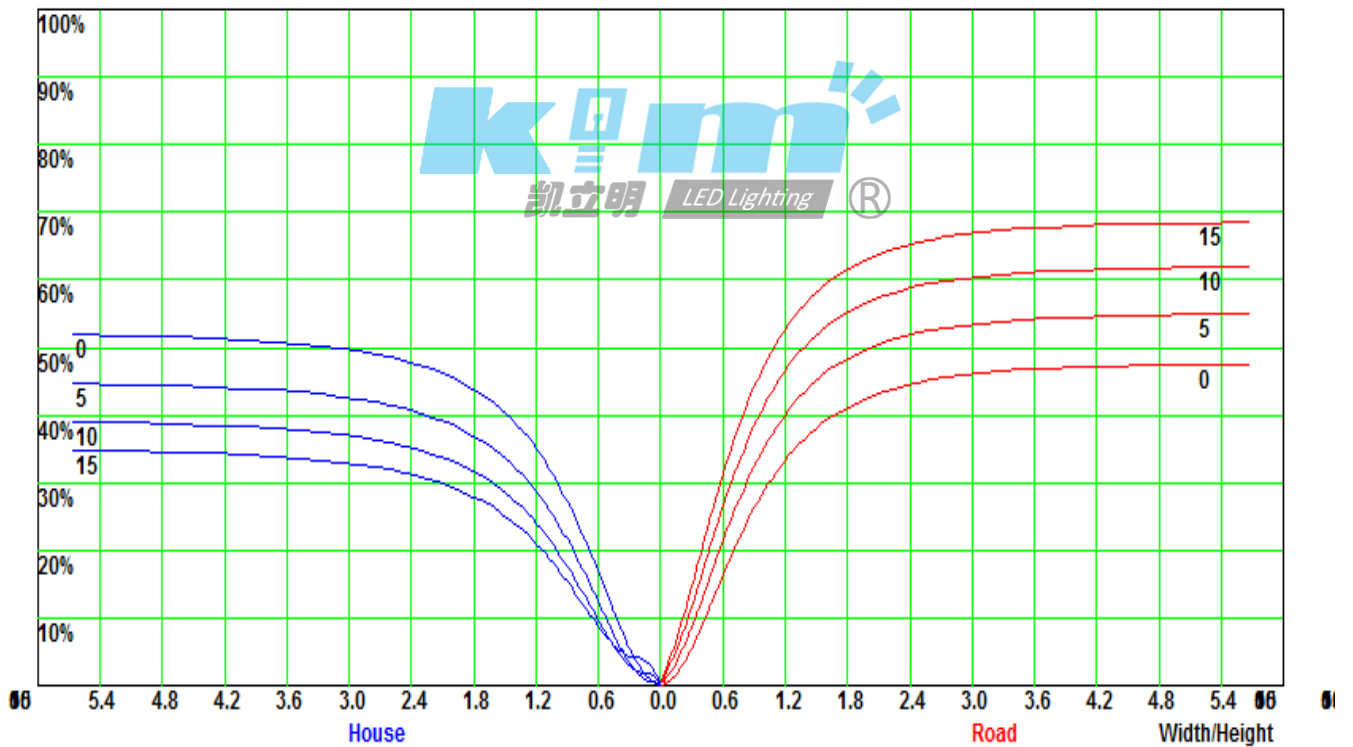


Isocandela(rectangle)

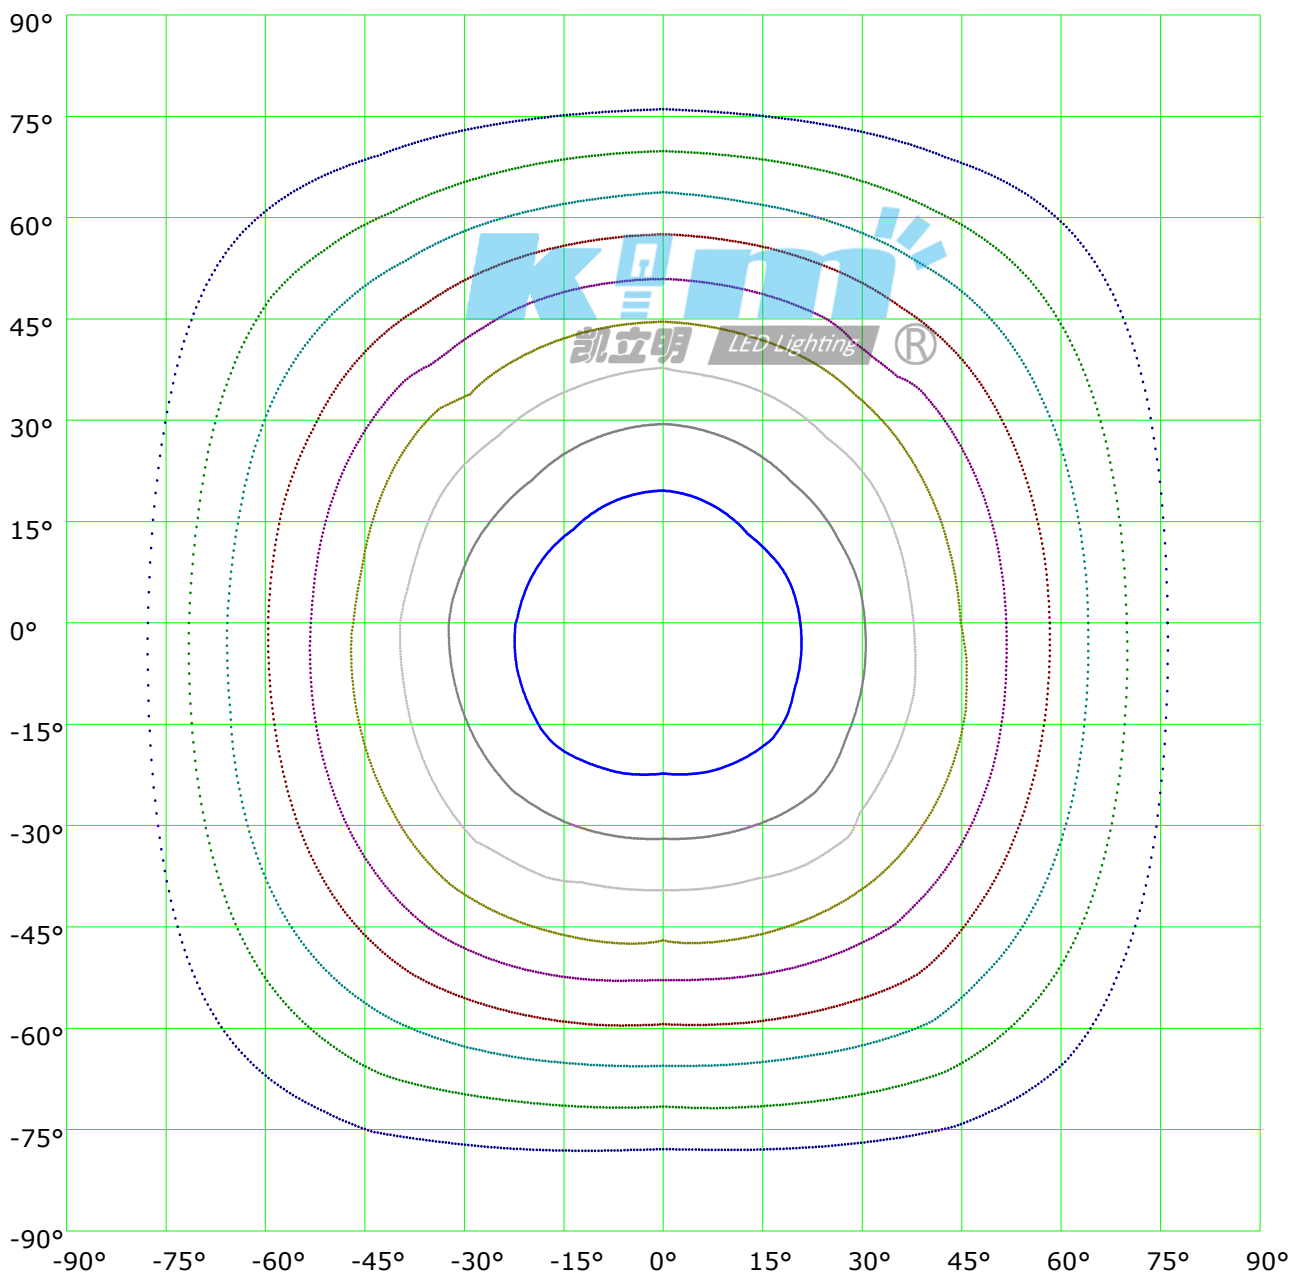

— (10%): 148.8cd	— (20%): 297.7cd	— (30%): 446.5cd	— (40%): 595.3cd
— (50%): 744.2cd	— (60%): 893.cd	— (70%): 1041.8cd	— (80%): 1190.7cd
— (90%): 1339.5cd	— (100%): 1488.3cd		


Isolx curve

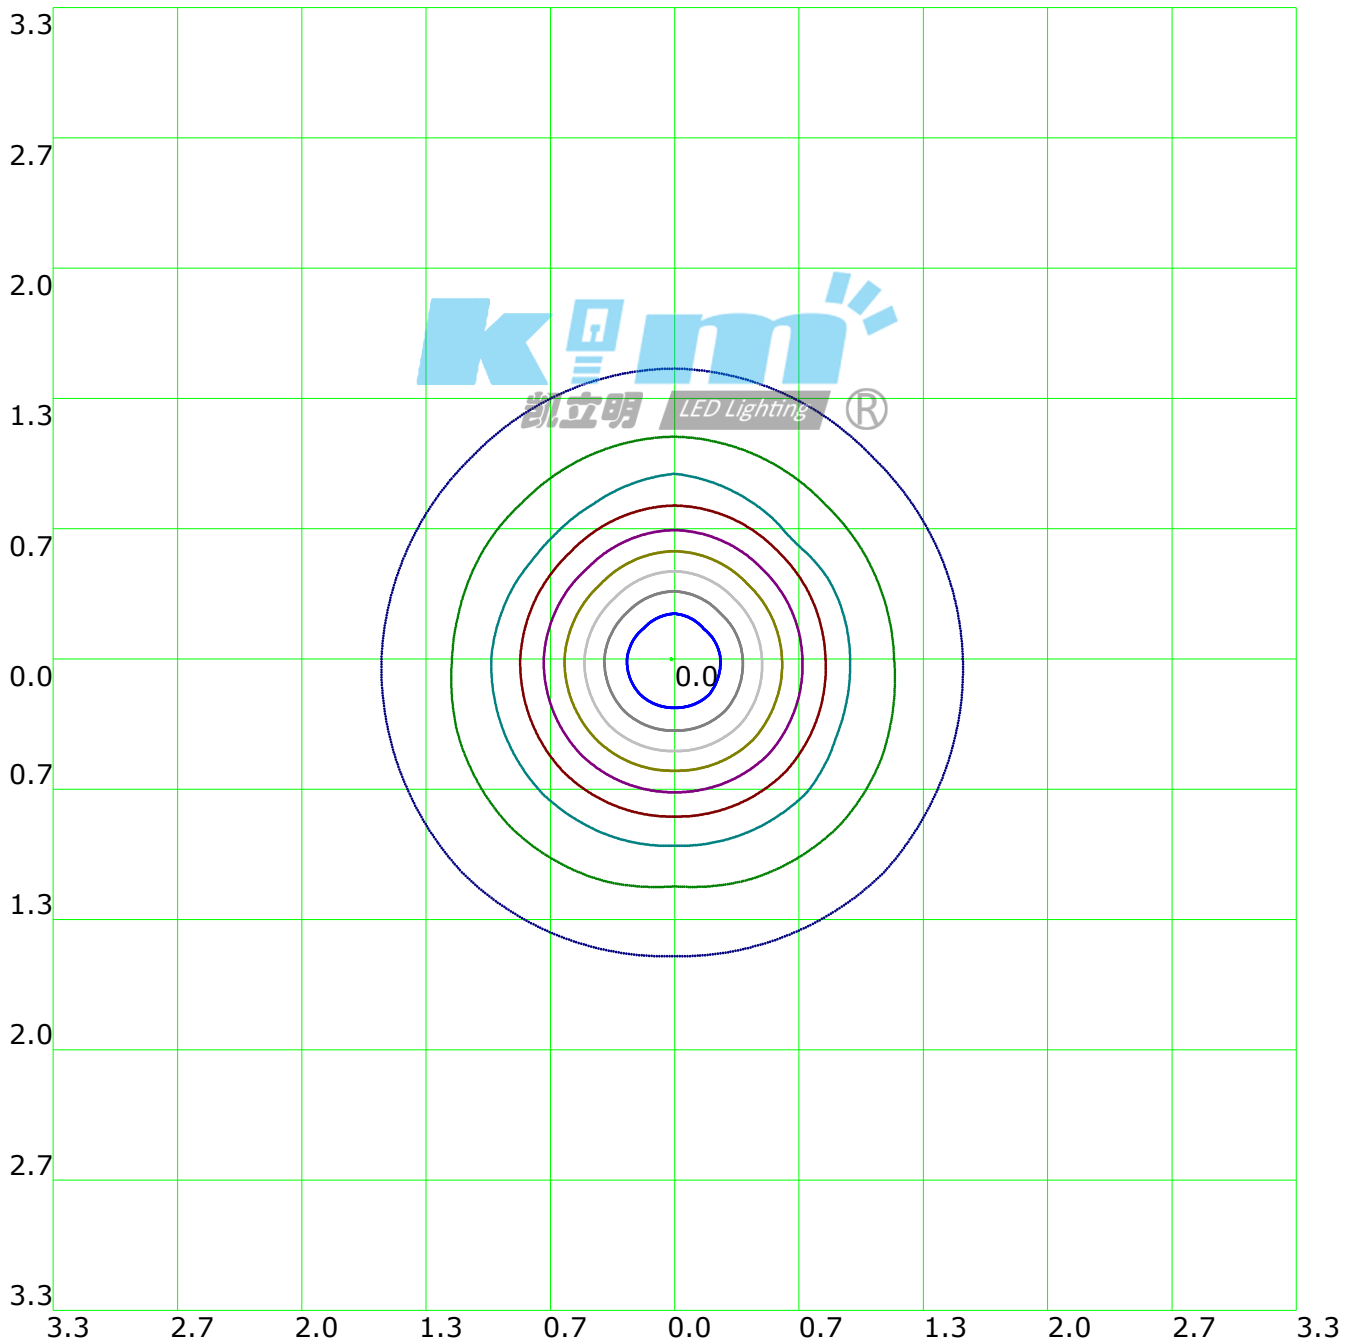

Height: 1 m

- | | | | |
|-------------------|--------------------|-------------------|-------------------|
| — (10%): 148.8lx | — (20%): 297.7lx | — (30%): 446.5lx | — (40%): 595.3lx |
| — (50%): 744.2lx | — (60%): 893.1lx | — (70%): 1041.8lx | — (80%): 1190.7lx |
| — (90%): 1339.5lx | — (100%): 1486.9lx | | |

Space Isolx Curve

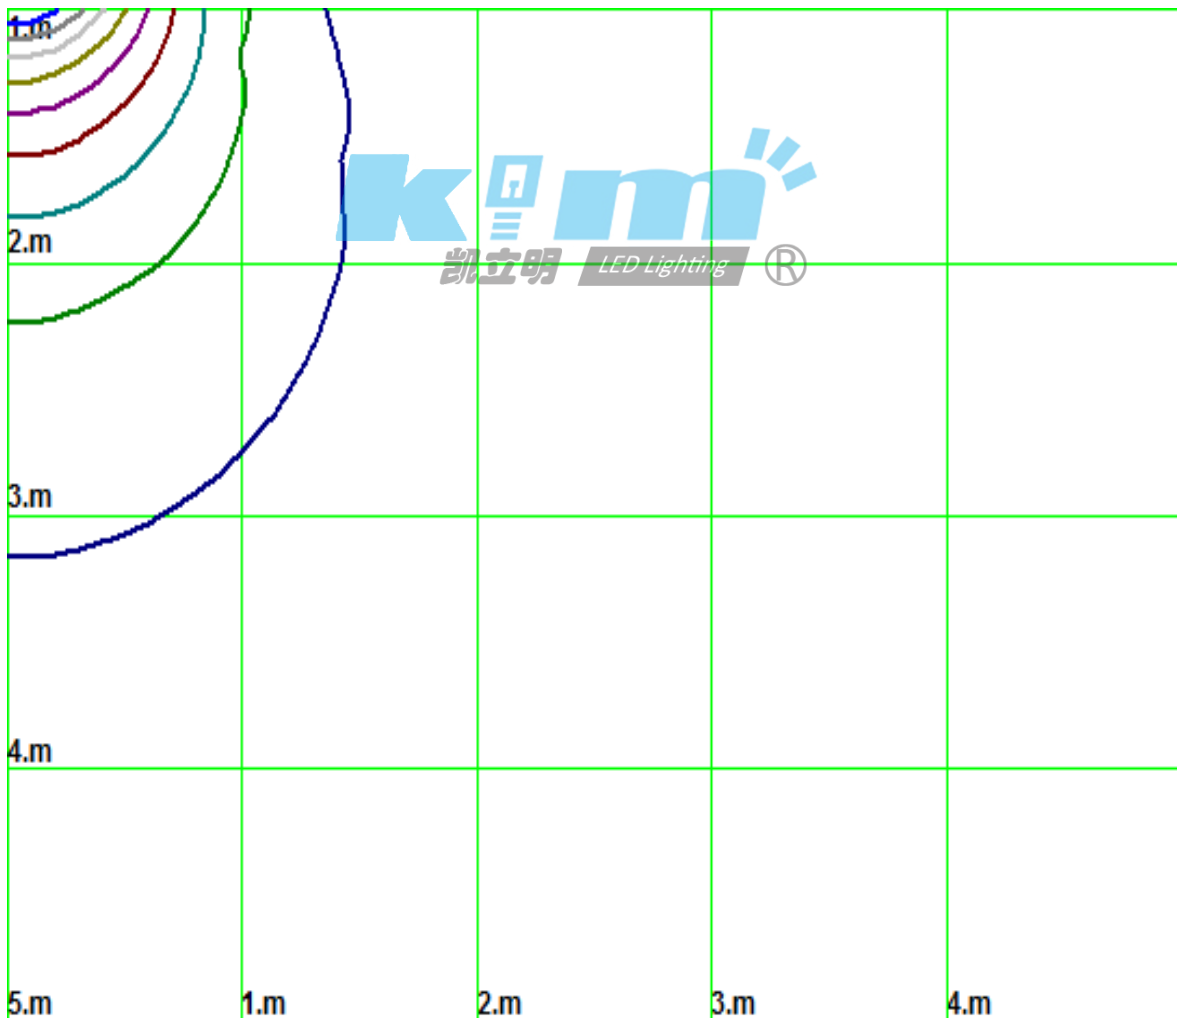

— (10%): 148.8lx	— (20%): 297.7lx	— (30%): 446.5lx	— (40%): 595.3lx
— (50%): 744.2lx	— (60%): 893.1lx	— (70%): 1041.8lx	— (80%): 1190.7lx
— (90%): 1339.5lx	— (100%): 1486.9lx		

Luminance Limiting Curve

Diameter: 0mm

Length: 0mm


Width: 0mm

Height: 0mm

(cd/m²)


γ	45°	50°	55°	60°	65°	70°	75°	80°	85°
C0	31191	29986	28586	26820	26210	21429	17105	10760	1877
C90	31520	30292	28898	27142	24750	21646	17250	10436	2739

Glare	Quality	Service Values Illuminance (lx)									
1.15	A	2000	1000	500	≤300						
1.5	B		2000	1000	500	≤300					
1.85	C			2000	1000	500	≤300				
2.2	D				2000	1000	500	≤300			
2.55	E					2000	1000	500	≤300		

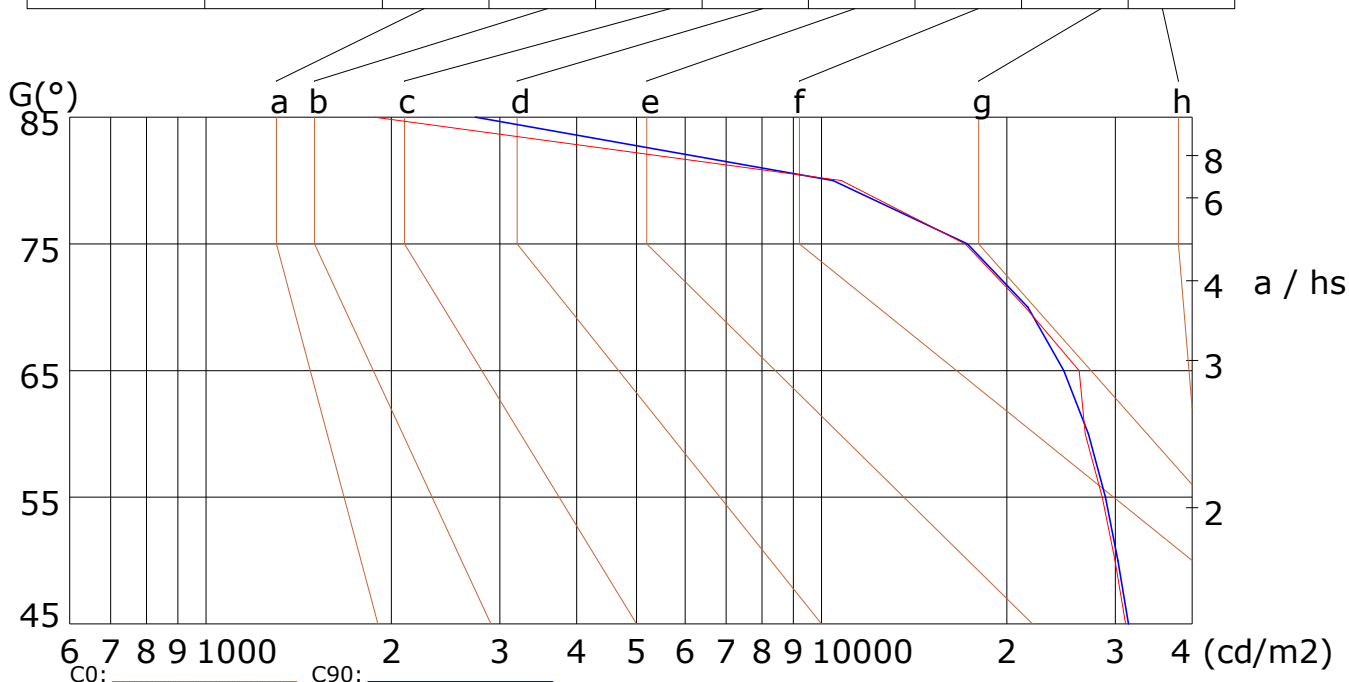

Lum. Limiting Curve (C0/C90)

Lux-Distance Curve

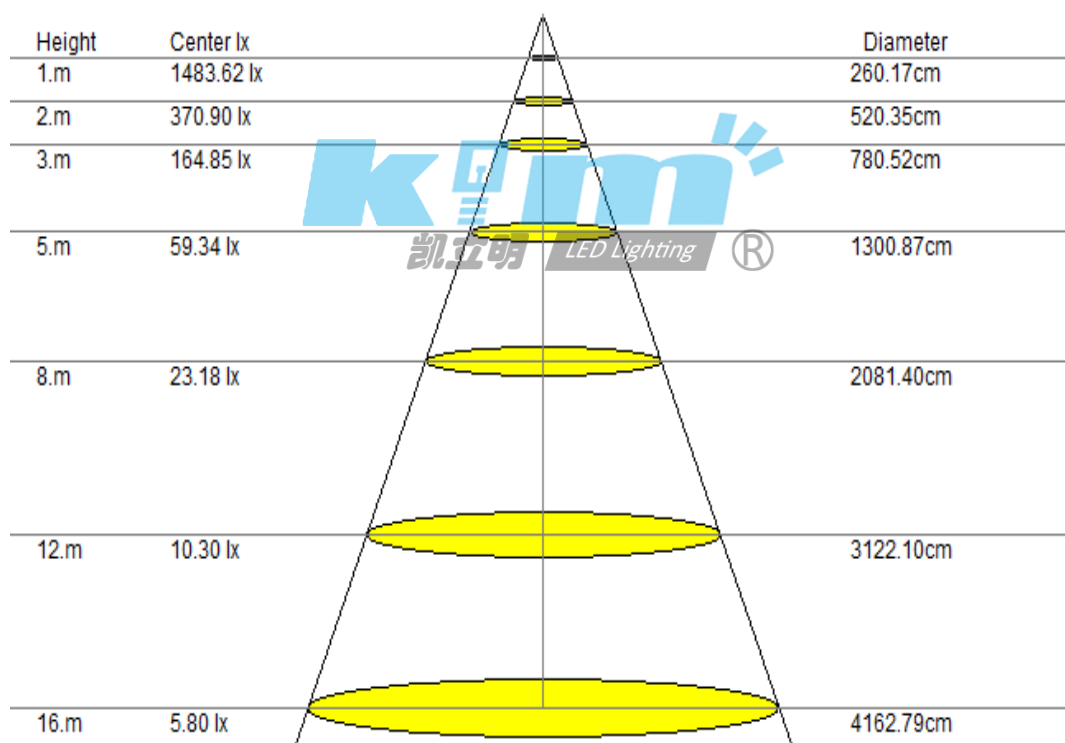


Beam Angle: 104.90°(50%Imax)

Coefficients of Utilization

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1	1.06	1.04	1.03	1.04	1.03	1.01	1.01	0.99	0.97	0.96	0.94	0.92	0.89	0.87	0.85	0.80
2	0.91	0.88	0.86	0.90	0.87	0.85	0.88	0.84	0.81	0.84	0.80	0.77	0.79	0.76	0.72	0.67
3	0.78	0.75	0.73	0.78	0.74	0.72	0.77	0.72	0.69	0.74	0.69	0.66	0.71	0.66	0.62	0.57
4	0.68	0.65	0.63	0.68	0.64	0.62	0.67	0.63	0.59	0.66	0.61	0.56	0.64	0.58	0.53	0.49
5	0.59	0.57	0.55	0.60	0.56	0.54	0.60	0.55	0.51	0.59	0.53	0.49	0.58	0.51	0.46	0.43
6	0.52	0.50	0.48	0.53	0.50	0.47	0.54	0.49	0.45	0.53	0.48	0.43	0.53	0.46	0.41	0.37
7	0.47	0.44	0.43	0.48	0.44	0.42	0.48	0.44	0.40	0.49	0.43	0.38	0.48	0.42	0.36	0.33
8	0.42	0.40	0.38	0.43	0.40	0.37	0.44	0.39	0.36	0.45	0.39	0.34	0.44	0.38	0.33	0.30
9	0.38	0.36	0.34	0.39	0.36	0.34	0.40	0.36	0.32	0.41	0.35	0.31	0.41	0.35	0.30	0.27
10	0.35	0.33	0.31	0.36	0.33	0.31	0.37	0.33	0.29	0.38	0.32	0.28	0.38	0.32	0.27	0.24

Indoor Budgetary Estimate Chart

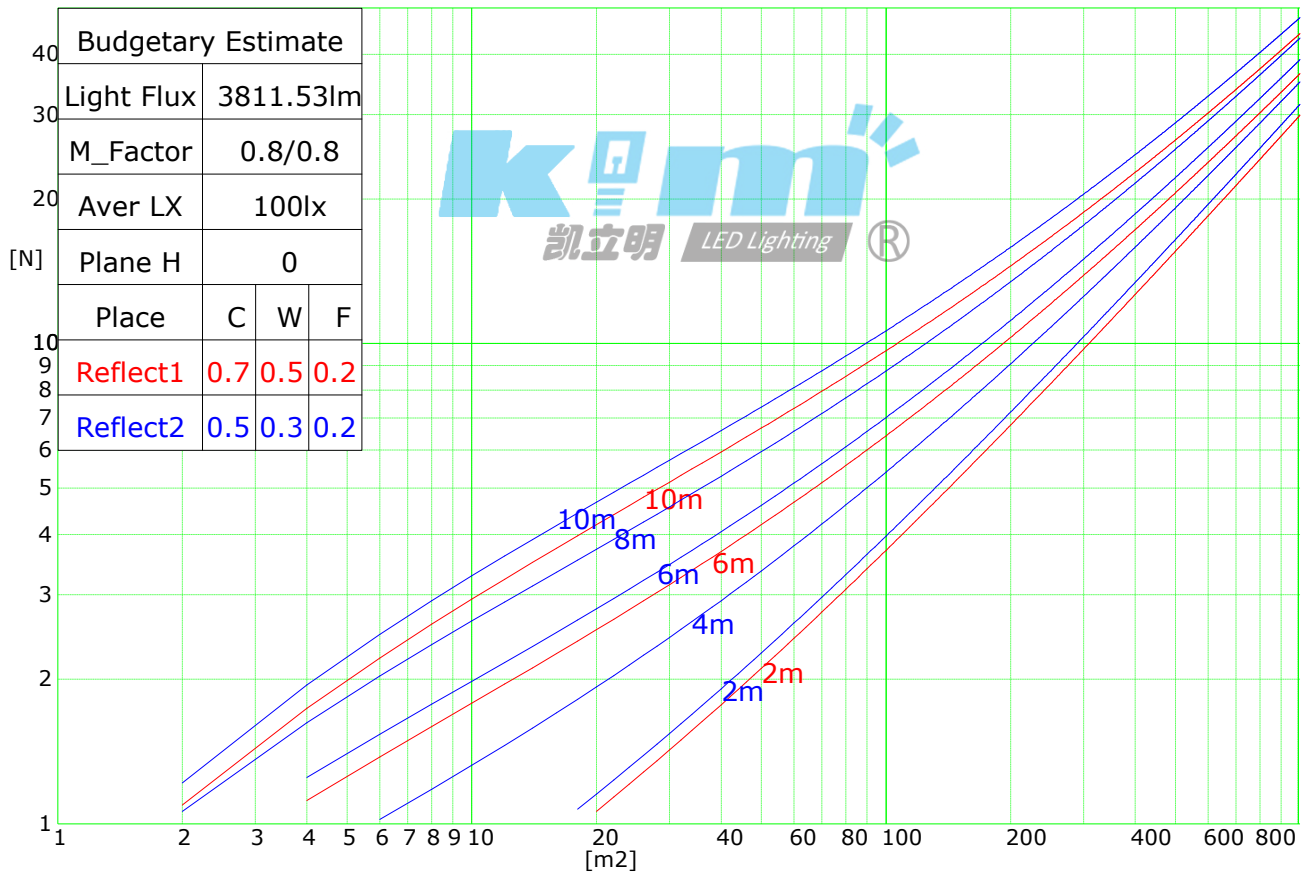

UGR综合眩光指数表

Ceiling	70	70	50	50	30	70	70	50	50	30	
Wall	50	30	50	30	30	50	30	50	30	30	
Floor	20	20	20	20	20	20	20	20	20	20	
Room Size	Left to light axis direction of observation					Direction of light axis parallel observation					
X	Y										
2H	2H	14.7	15.9	15.0	16.0	16.5	14.5	15.8	14.8	15.9	16.4
	3H	16.4	17.4	16.6	17.7	18.0	16.1	17.3	16.6	17.8	18.0
	4H	17.1	18.0	17.4	18.6	18.7	17.0	17.9	17.2	18.6	18.7
	6H	17.5	18.6	18.0	18.8	19.1	17.4	18.4	17.8	18.8	19.0
	8H	17.9	18.9	18.1	18.9	19.4	17.7	18.7	18.0	19.0	19.3
	12H	18.0	18.9	18.3	19.3	19.6	17.8	18.8	18.1	19.2	19.6
4H	2H	15.8	16.7	15.7	16.9	17.1	15.7	16.6	15.7	16.8	17.1
	3H	17.4	18.3	17.7	18.4	18.9	17.3	18.3	17.6	18.5	18.7
	4H	18.1	19.1	18.5	19.2	19.6	18.0	18.9	18.4	19.1	19.4
	6H	18.9	19.6	19.1	19.7	20.1	18.6	19.4	19.1	19.8	20.0
	8H	19.0	19.7	19.4	19.9	20.4	18.9	19.6	19.4	20.0	20.3
	12H	19.3	19.9	19.6	20.0	20.4	19.1	19.8	19.5	20.2	20.4
8H	4H	18.6	19.1	18.8	19.3	19.9	18.4	19.1	18.7	19.3	19.9
	6H	19.4	19.9	19.7	20.2	20.5	19.3	19.8	19.7	20.3	20.5
	8H	19.7	20.1	20.2	20.5	20.9	19.6	20.0	20.0	20.4	20.9
	12H	20.0	20.4	20.4	20.8	21.2	19.8	20.3	20.3	20.8	21.2
12H	4H	18.6	19.1	19.1	19.4	19.9	18.4	19.1	18.9	19.5	19.8
	6H	19.5	19.9	19.9	20.3	20.6	19.5	20.0	19.8	20.3	20.6
	8H	19.8	20.4	20.4	20.5	21.0	19.7	20.2	20.3	20.5	21.1