




DOWN LIGHT



DLM0501



DLM0901



DLM1501

Unit: mm

Item number	Watts	Input Volt	CCT	LED Type	LED Lumens	Beam Angle
DLM0501	5W	100-240V	3000K	COB	550lm	36°
DLM0901	9W	100-240V	3000K	COB	1050lm	38°
DLM1501	15W	100-240V	3000K	COB	2000lm	36°

FEATURES

Main Voltage Aluminium Down Light
For outdoor ceiling / hallway / eaves

LED: 5W / 9W / 15W (3000K / 4000K / 5000K)

Reduced Glare: Sunken light source

Beam Angle: 5W (16° / 24° / 36°) ; 9W (15° / 24° / 38° / 60°) ; 15W(16° / 24° / 36°)

Finish: Matt Black Anodized

IP rated: IP65

mounting Type: Surface mounting.


100-240VAC input, supplied with driver

Certification:  US

Patent #: ZL 2015 2 0276208.6

3 year limited guarantee

OPTICAL SPECIFICATION

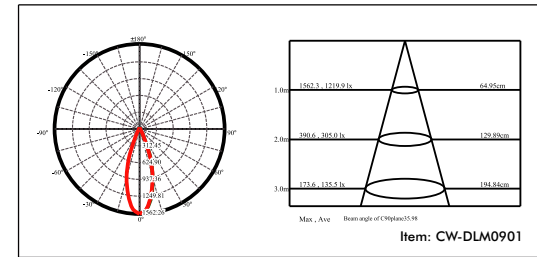


OPTIONAL ACCESSORIES

Anti-glare lens

Honeycomb louver




9W: DLAH03



Unit: mm



5W / 15W: DLAH02



Unit: mm

