



KLM CO., LIMITED

Hi Lumen, Bye Watts.

www.klmighting.com



NEW 2020



LED TRACK LIGHT

dimming button
at the back of the track light.

TRACKLIGHT



Round: 12°/24°/38°
 Square: 50°*50°/70°*70°
 Rectangle: 35°*70°


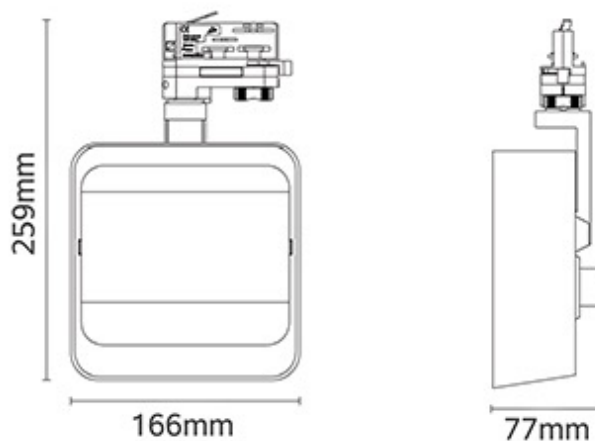


2 wire/3 wire/4 wire
Adaptor for your choice

350° rotatable

Vertical 100° range


Colors: White / Black

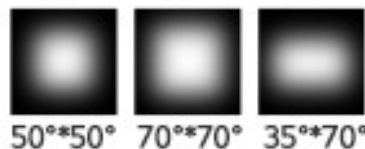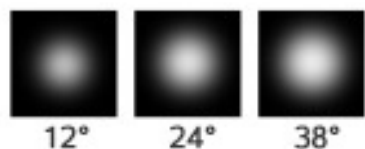

Available beam angle
Uniform light output, no glare

Adopts pure aluminum
die-casting structure





DIMMING BUTTON

at the back of the track light



TRACK LIGHT

Model	KLM-080-25W	KLM-080-30W	KLM-080-35W
Power	25W	30W	25W
CCT	2700K-3000K-4000K-5000K		
Input Voltage	AC220V	AC220V	AC220V
Frequency	50/60Hz	50/60Hz	50/60Hz
Material	Dia casting Aluminium	Dia casting Aluminium	Dia casting Aluminium
Size	L259*W166*H77	L259*W166*H77	L259*W166*H77
Led Brand	SMD5050	SMD5050	SMD5050
CRI	RA80/90/95	RA80/90/95	RA80/90/95
Lumen	90LM/W	90LM/W	90LM/W
Beam angle	Round: 12°/24°/38° Square: 50°*50°/70°*70° Rectangle: 35°*70°		
Dimmable	Triac DIM / 0-10V / DALI		

