


# VINE

Vine Flexible Magnetic Lighting





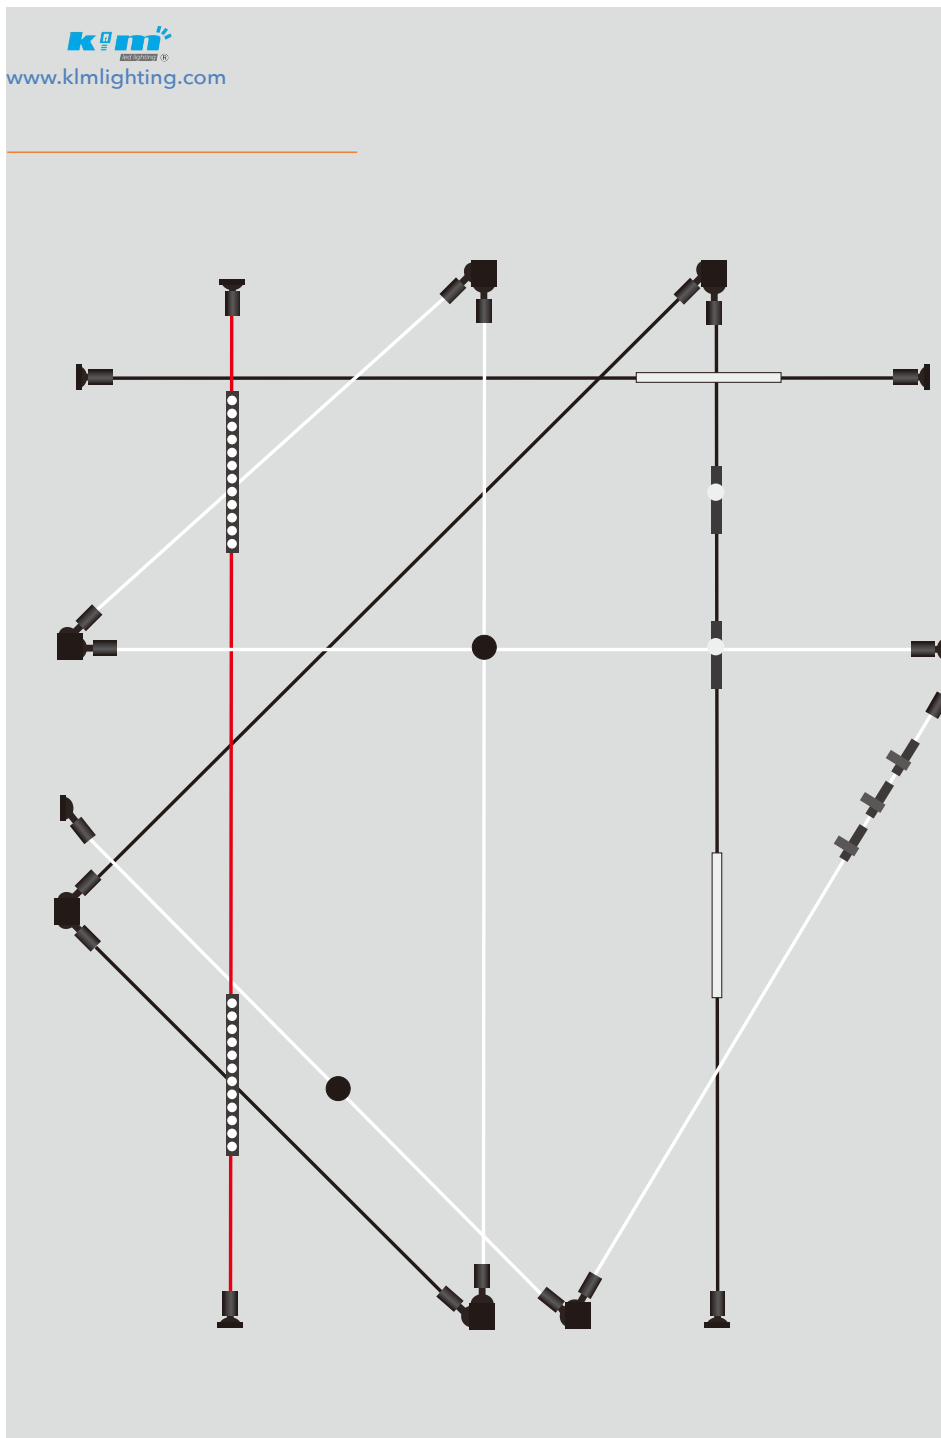

Beyond what you want to lead the future

## Track bar



KLM-GD1811D/L1000/T

## Lights



KLM-SD2265T/3W



KLM-SD3463T/5W




KLM-SD34100T/8W




KLM-GSD3660T/L284/7W




KLM-PMD3660T/L313/8W

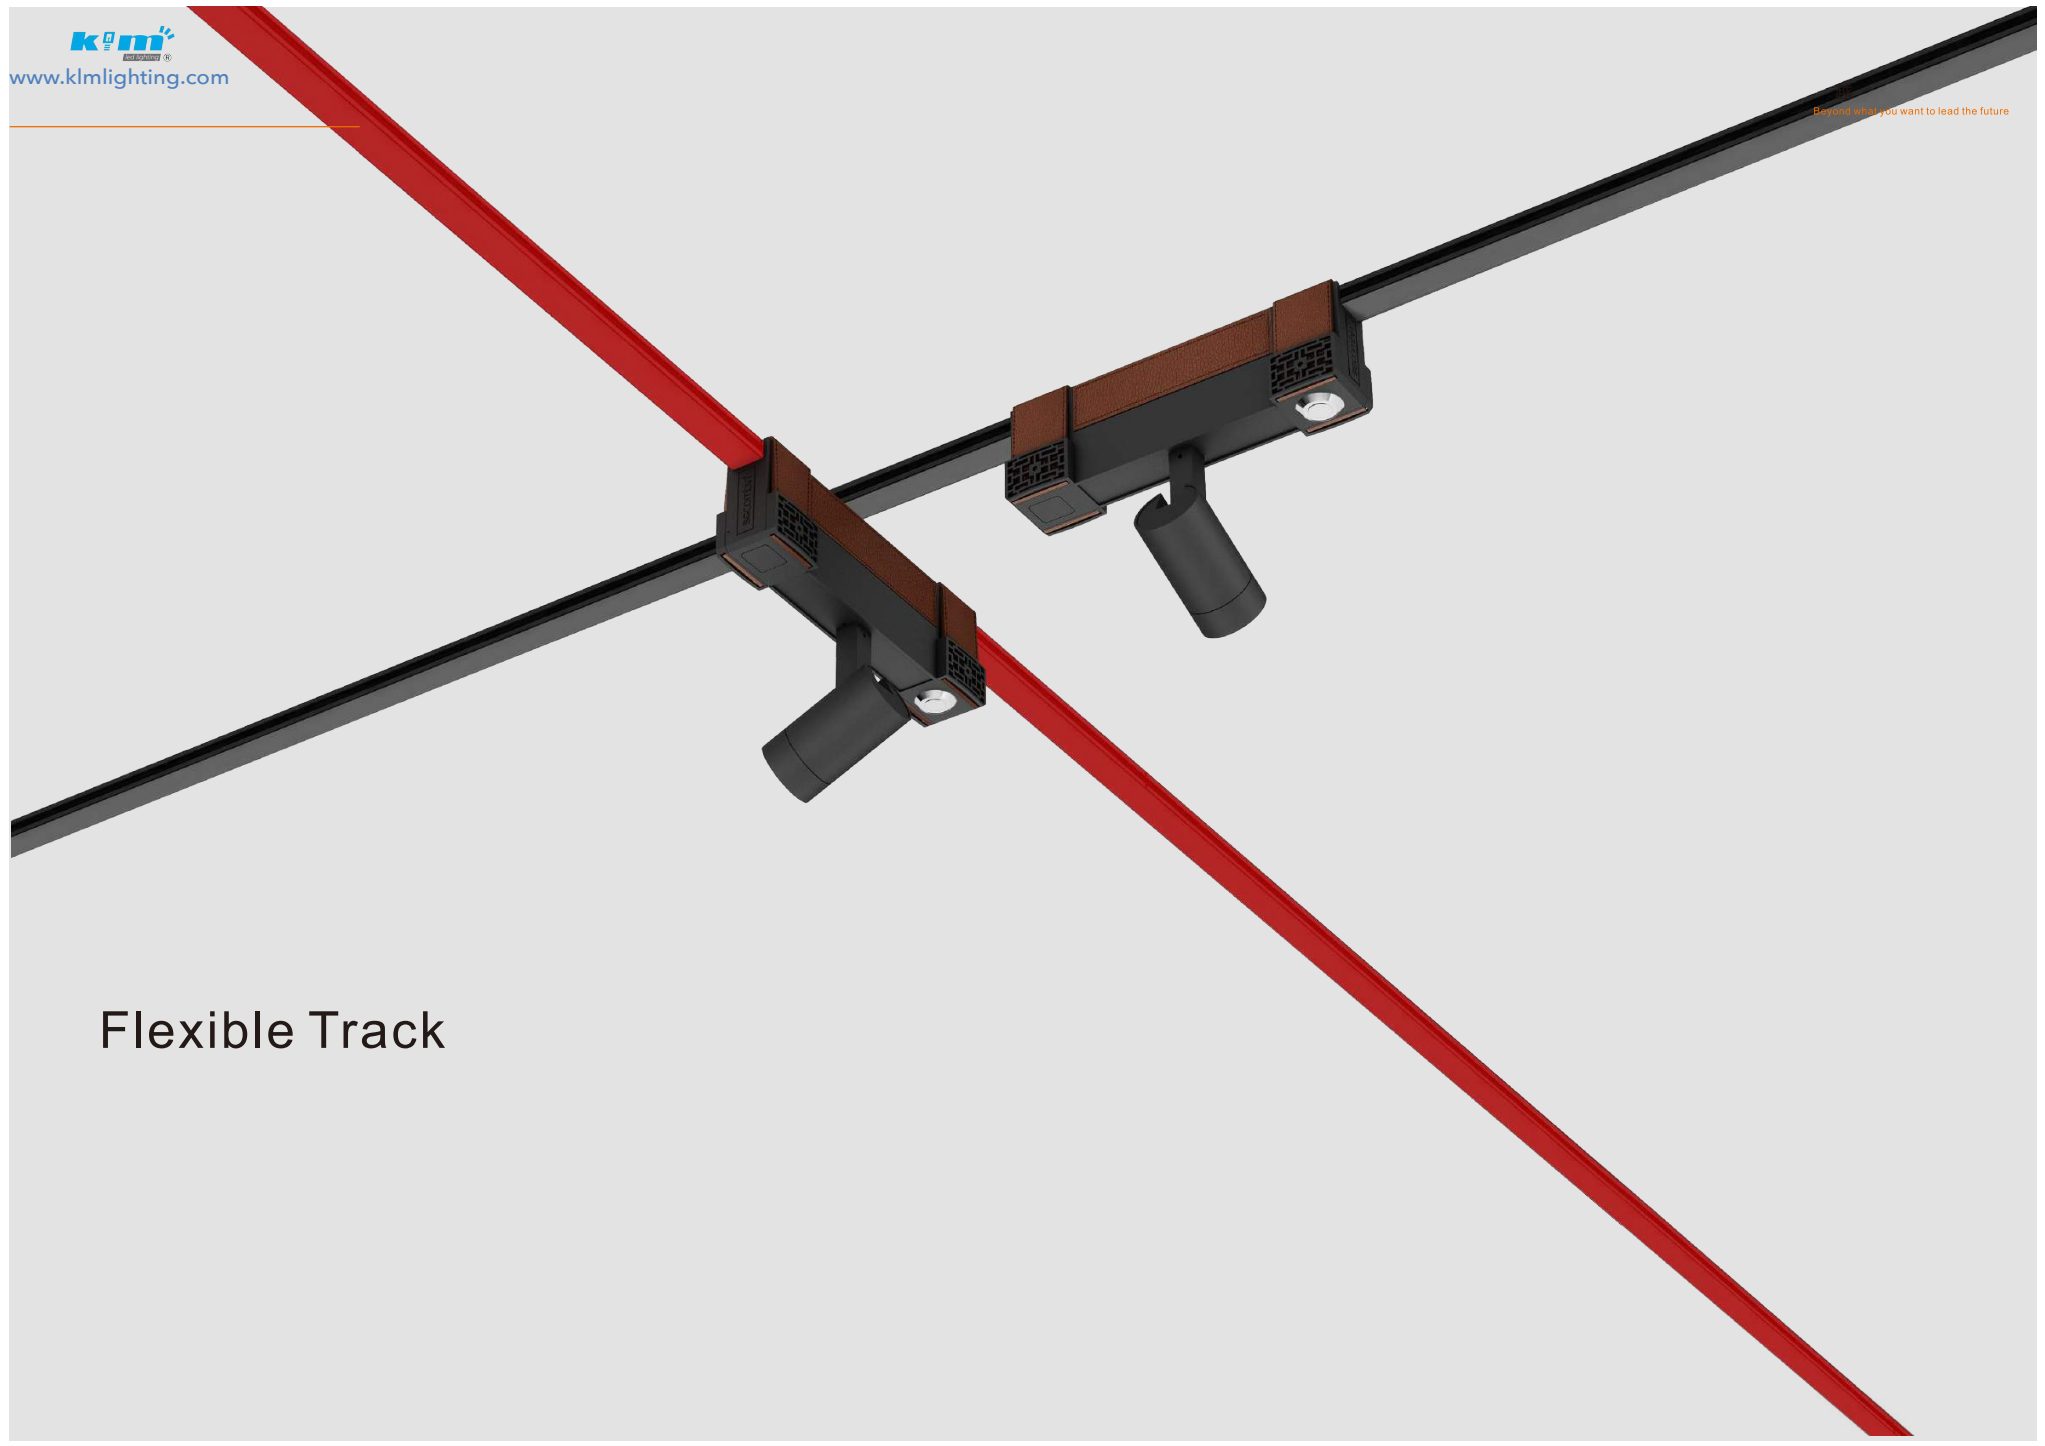

Flexible Track

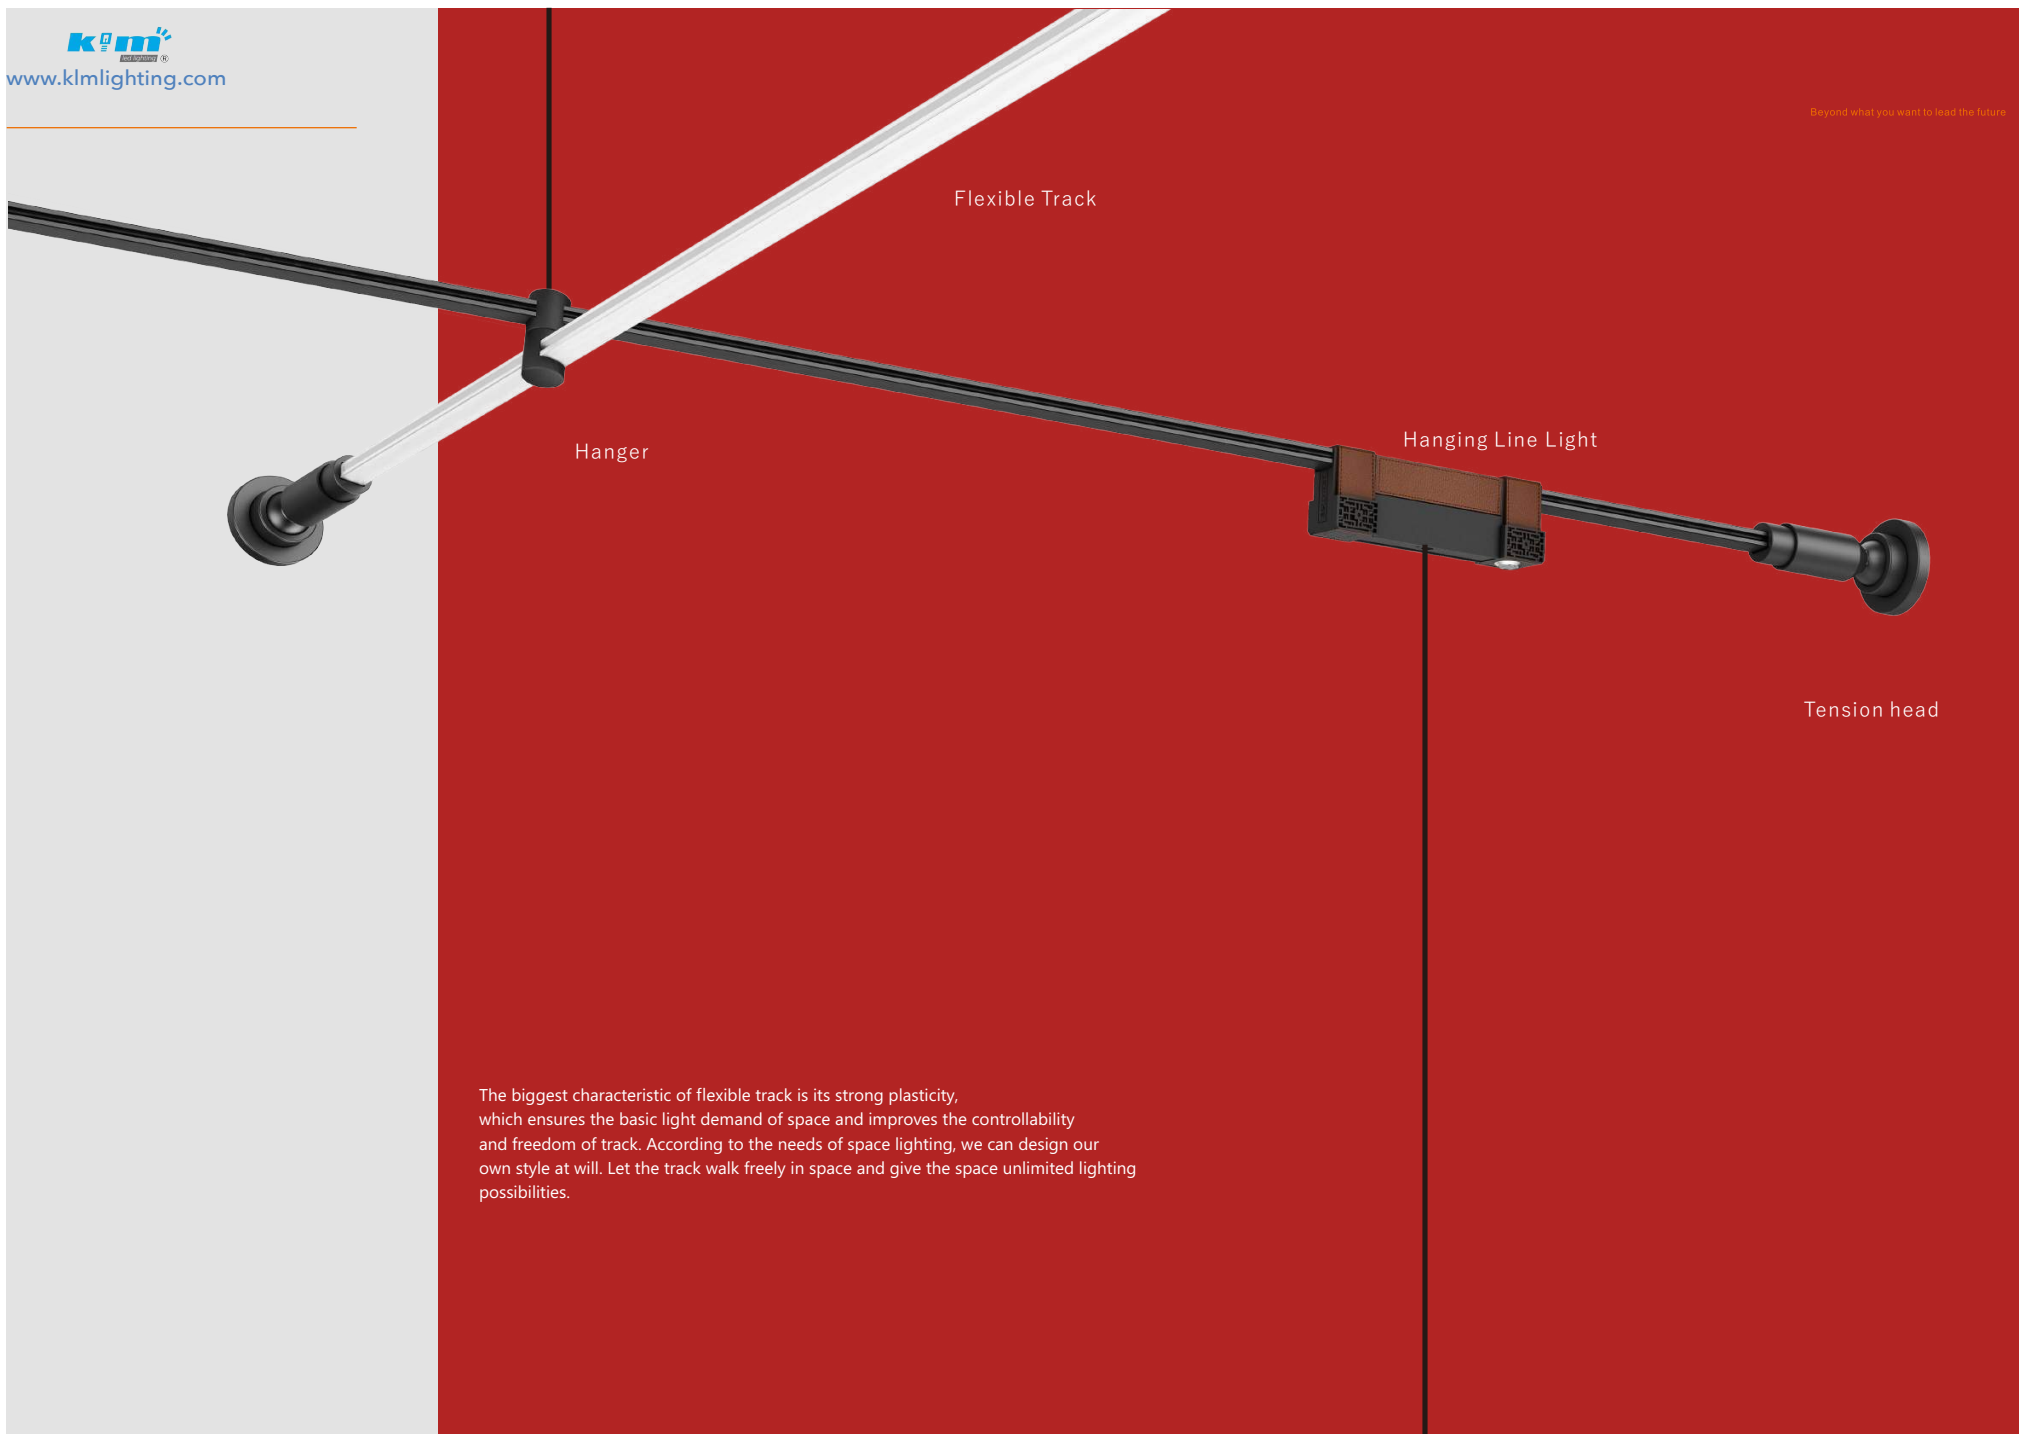

The biggest characteristic of flexible track is its strong plasticity, which ensures the basic light demand of space and improves the controllability and freedom of track. According to the needs of space lighting, we can design our own style at will. Let the track walk freely in space and give the space unlimited lighting possibilities.

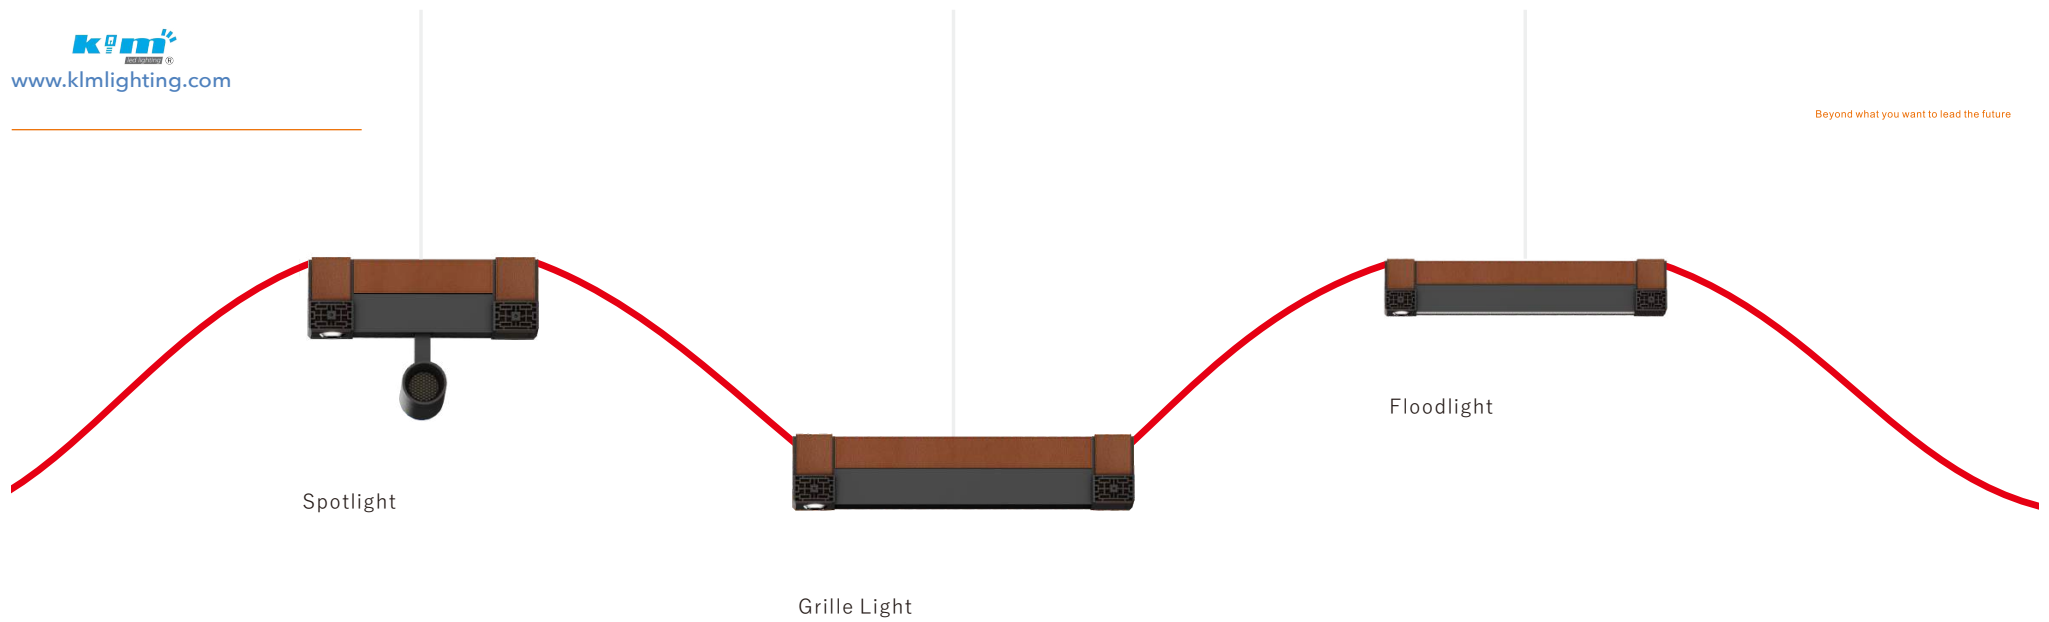


## DC24V


### DC24V safety rail

The installation of Bani series lamp module is very simple and convenient; The safety voltage of 24V is adopted, which can be touched after being electrified, and the mechanical buckle type and belt button type double fixation are adopted, so that the working stability of the lamp is ensured, the service life is prolonged, and the safety of the lamp in the process of installation, disassembly and maintenance is guaranteed.

## Free combination

Multi-angle connection lighting direction free  
rotation angle adjustment free installation

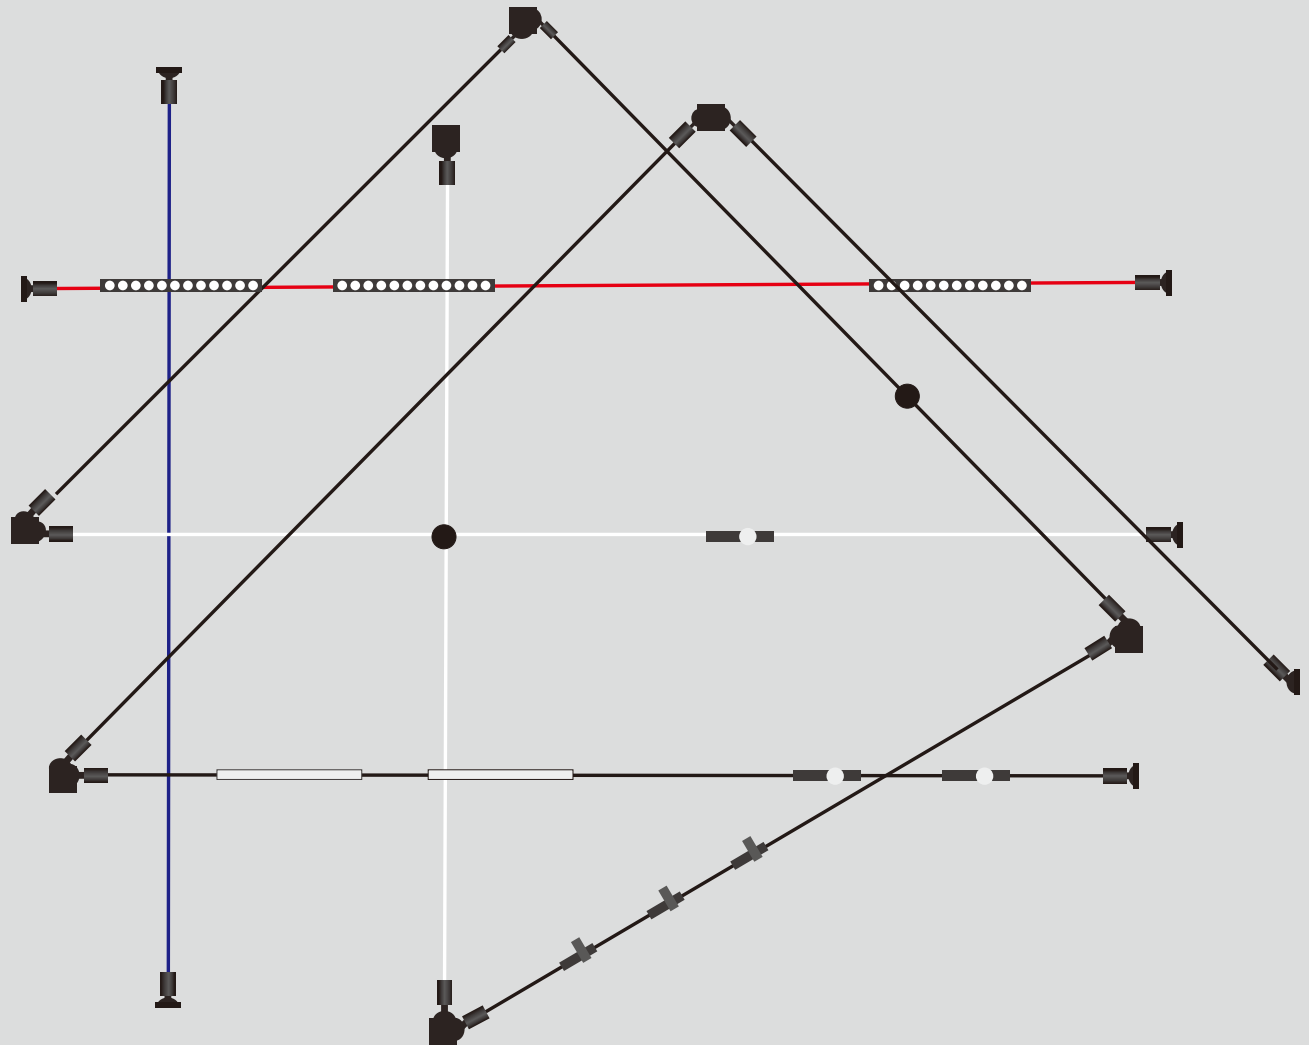

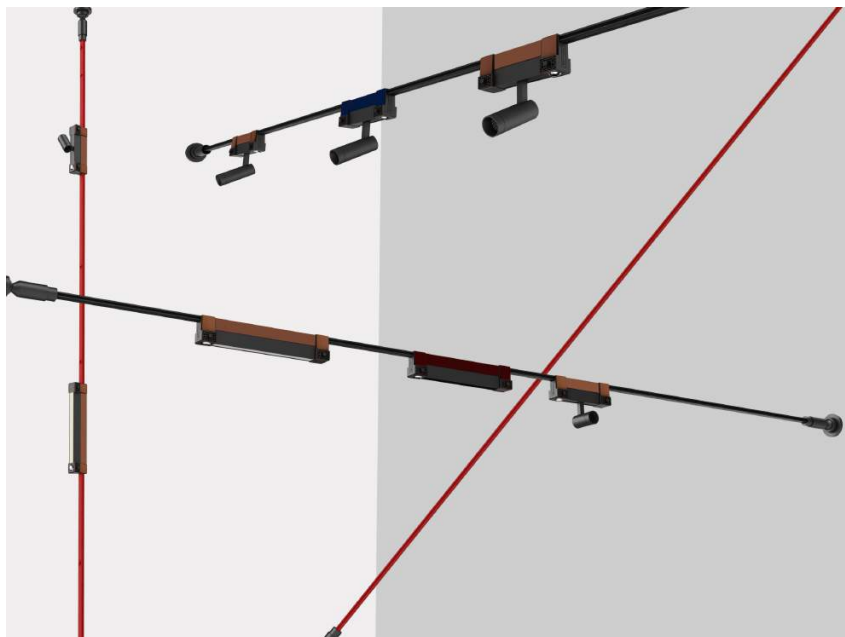


## 01 Space

Leaving only light from the walls to the ceiling; The base can be adjusted up and down by 70 degrees, and is convenient to install, and is suitable for diversified spaces such as special-shaped spaces, domes and the like. It has both functional and artistic lighting, reshaping space light and shadow, and bringing more possibilities for interior space and lighting design.

## 02 Flexbile

Barney series links the ceiling and wall, has a strong orientation, can also increase lighting at will, has a sense of freshness and design, can be called modular design, traditional magnetic attraction lamp, Barney series can meet. Comprises a magnetic suction tube lamp, a spotlight, a grid lamp, a floodlight strip and a pendant lamp line lamp. Installation is simple, you can match at will.

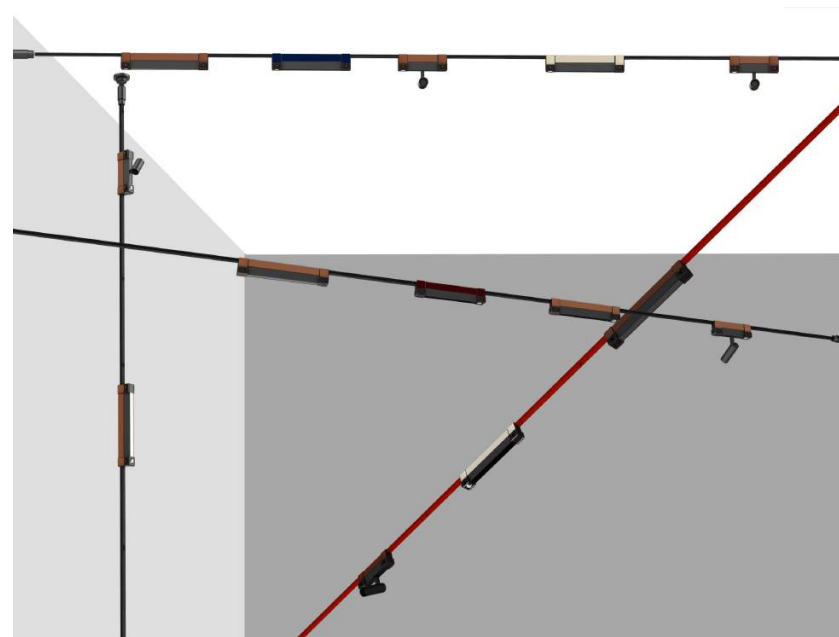


## 03 Easy install

Barney series abandoned the superfluous and exaggerated shape, re-deconstructed the shape of the lamp, flexible use, it can be arbitrarily cut according to the size of the venue custom size. Multi-angle connection, free rotation and adjustment of lighting direction, free angle, and easy installation.

## 04 Application

Return to the essence of the charm of streamline lighting minimalist shape; Applicable to: art galleries, art galleries, clubs, villas, exhibition halls, commercial space, office space, design studios, furnishings spaces

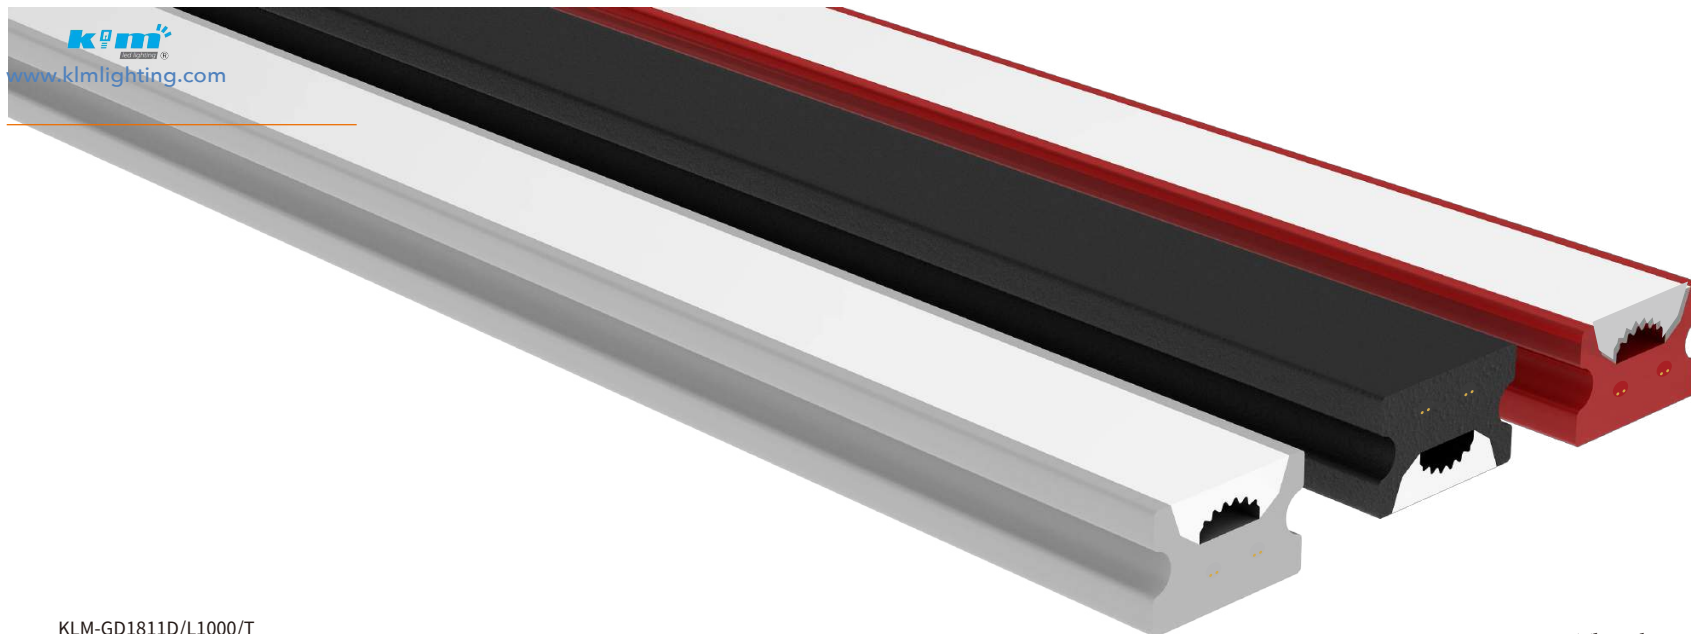

KLM-GD1811D/L1000/T


Suspended kits

L000/1500/2000mm

Single group control

Silicon materials

IP20




The silicone material gives it the ability to

twist

width **1.8cm**

More shapes

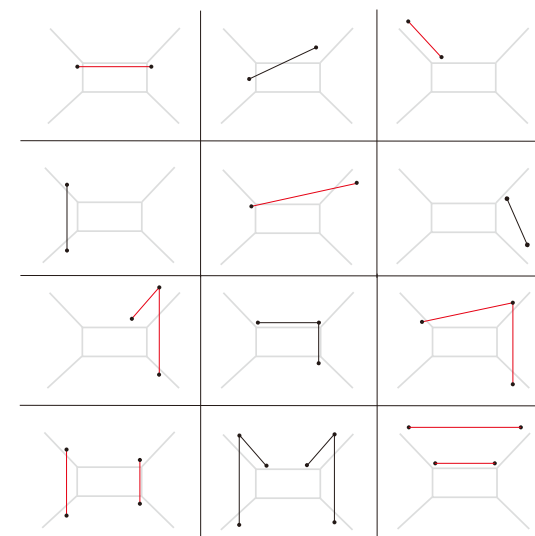

Single



Double




Single hanging





Double hanging





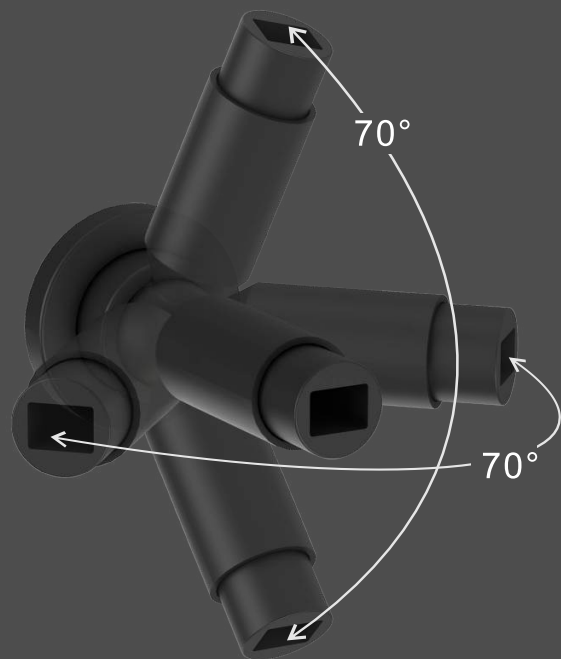


## Tension head

Single wall mounted	Ø67*123



Double wall mounted	60*113





Hanger

Single hanging	Ø20*15
----------------	--------




Double hanging	Ø20*30
----------------	--------

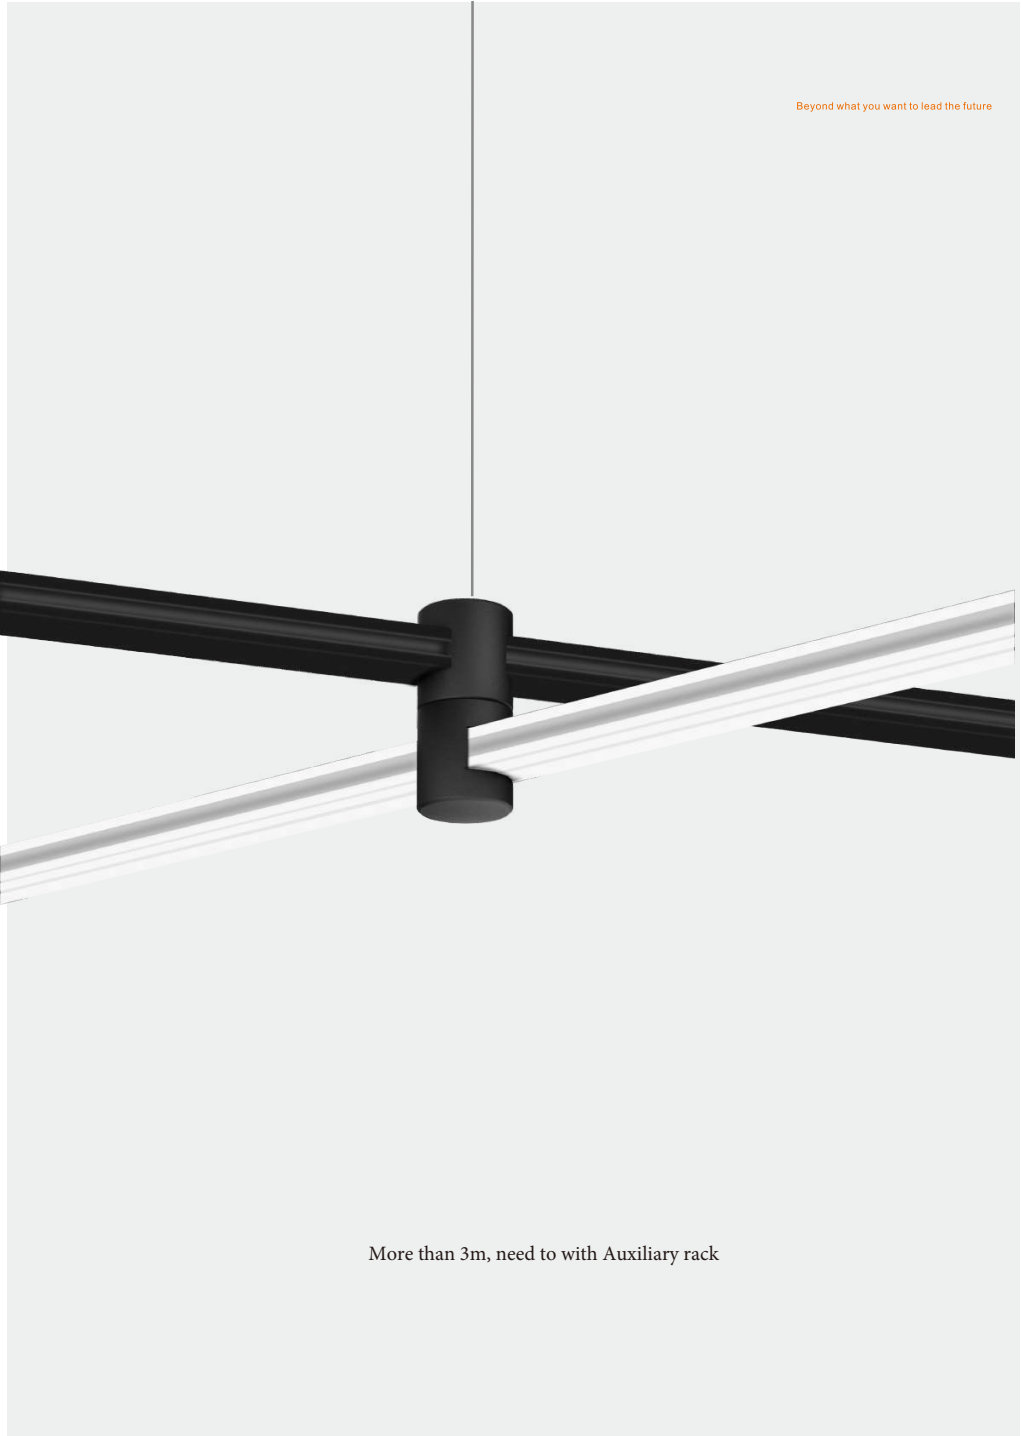

Beyond what you want to lead the future

More than 3m, need to with Auxiliary rack

# Up & Down

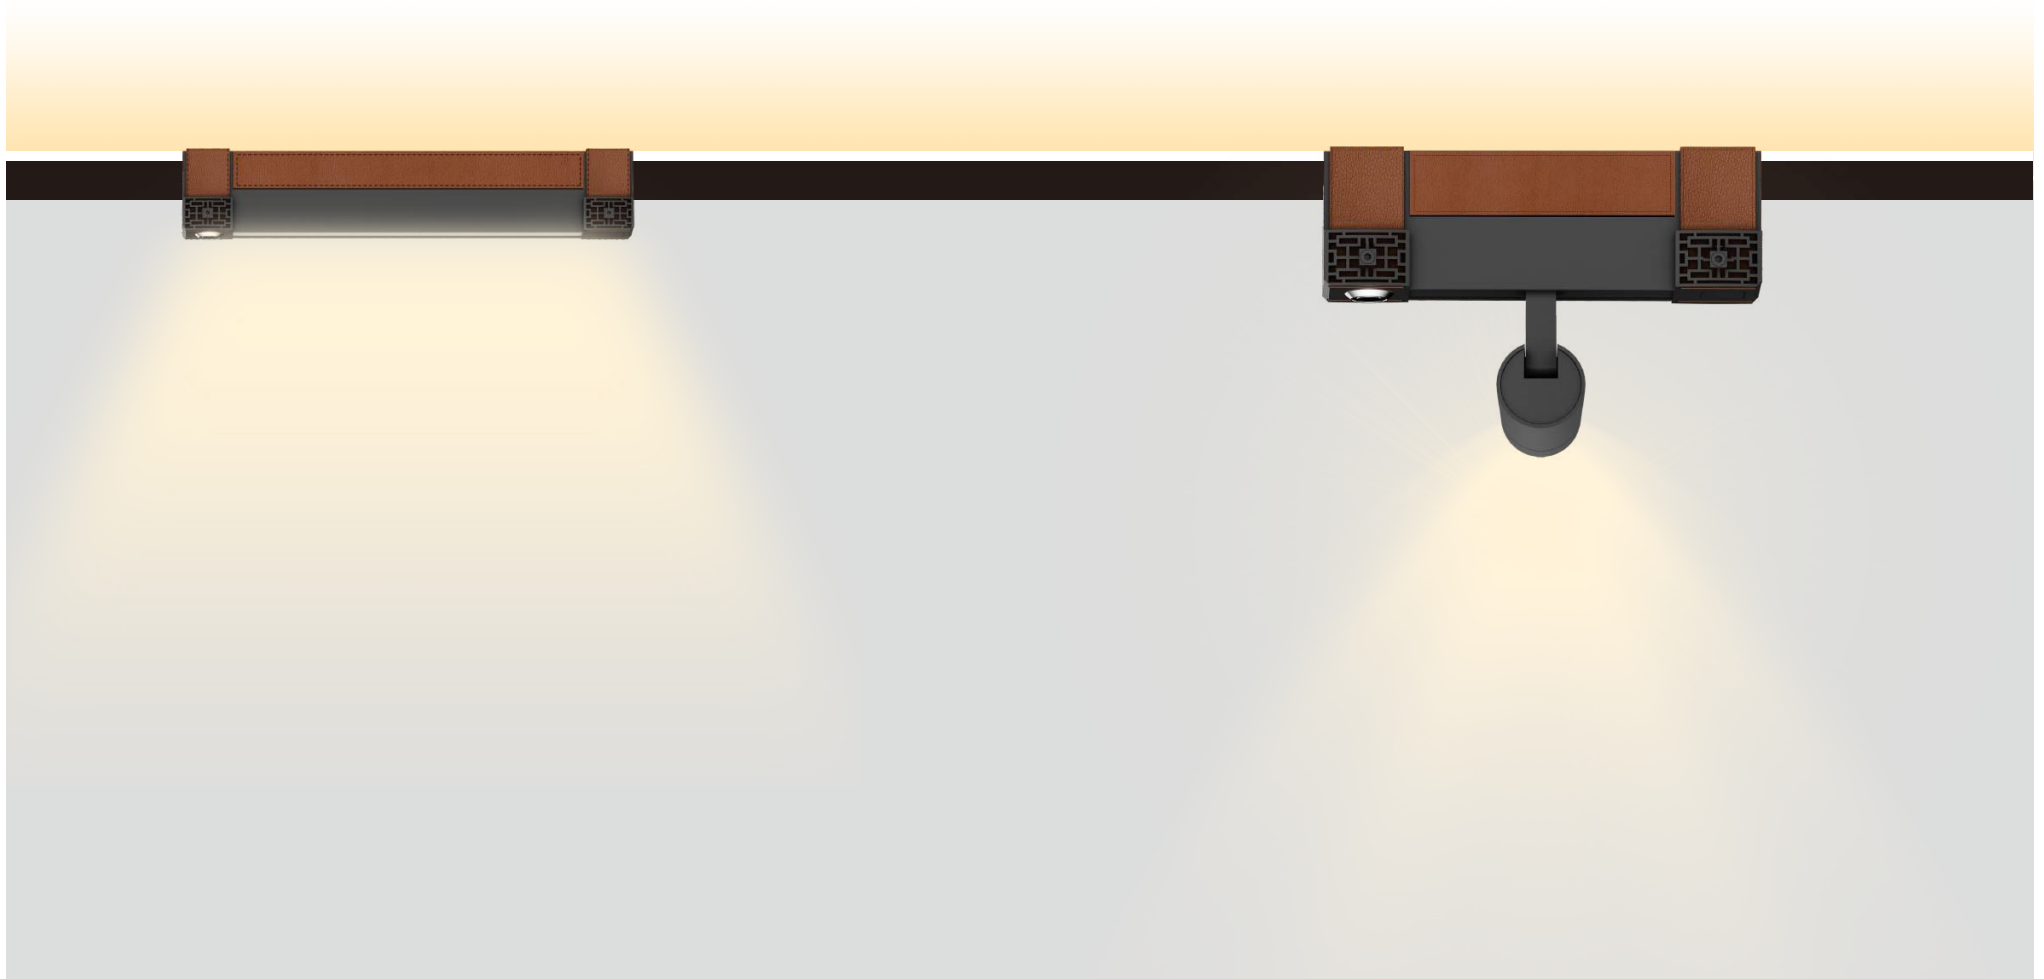




Beyond what you want to lead the future

touch connect




(mm):



Control system


- ON/OFF
- 0-10V
- DALI

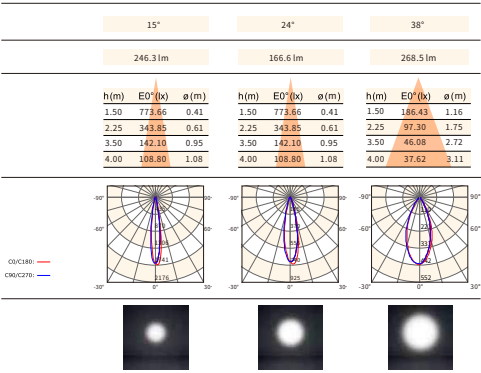


KLM-SD2265T/3W  
Ø22\*65mm  
IP20

Osram  
DC24V  
3W  
2700K/3000K/4000K  
CRI : ≥90  
15°/24°/38°



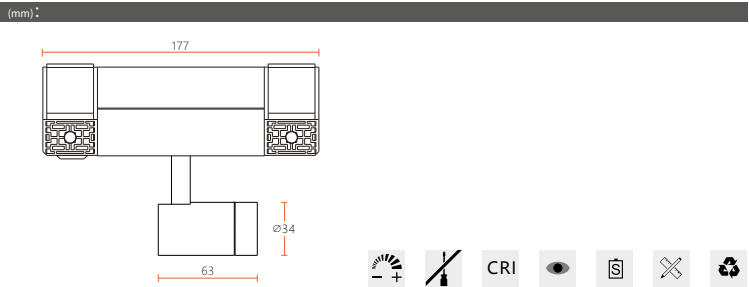

- ON/OFF
- 0-10V
- DALI

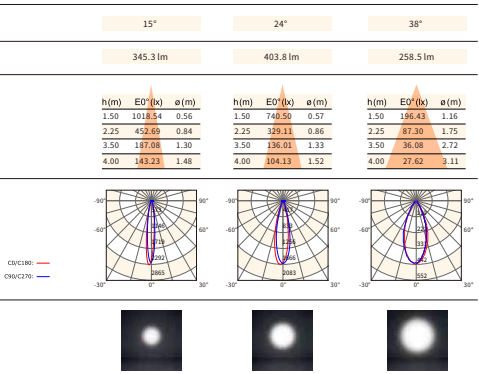


KLM-SD3463T/5W  
Ø34\*63mm  
IP20


Honourtek/  
LuminusDC24V  
5W  
2700K/3000K/4000K

CRI : ≥90  
15°/24°/38°



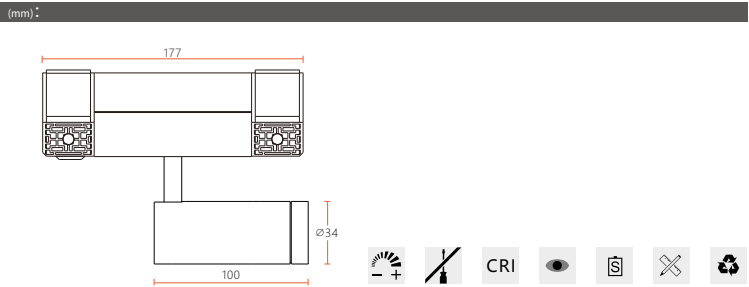

- ON/OFF
- 0-10V
- DALI

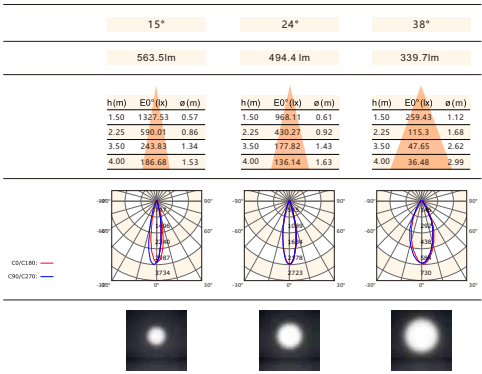

KLM-SD34100T/8W  
Ø34\*1100mm  
IP20

LEDs: Honourtek/Luminus  
Voltage: DC24V  
8W  
2700K/3000K/4000K  
CRI : ≥90  
15°/24°/38°



Original



Blue




White



Red

(mm):




- ON/OFF
- 0-10V
- DALI

25°

399.2 lm

h(m)	E0°(lx)	ø(m)
1.50	733.35	0.55
2.25	325.93	0.82
3.50	134.70	1.28
4.00	103.13	1.47



CRI/C180:

CRI/C270:



KLM-GSD3660T/L284/7W  
L284\*W36\*H60mm  
IP20

CSRAM  
024V  
7W


CCT: 2700K/3000K/4000K  
CRI : ≥90  
25°



2700K 3000K 4000K



mm)




- ON/OFF
- 0-10V
- DALI
- 

100°

167.1lm

h(m)	E <sub>0</sub> (lx)	σ(m)
1.50	20.04	3.64
2.25	13.35	5.46
3.50	5.52	8.50
4.00	4.22	9.72



C<sub>0</sub>/C<sub>180</sub> —  
C<sub>90</sub>/C<sub>270</sub> —



KLM-PMD3660T/L313/8W  
L313\*W36\*H60mm  
IP20

CRAM  
D24V  
8W  
2700K/3000K/4000K  
CRI : ≥90  
100°



# VINE


Flexible Lighting System




超越所想·超越自由  
BEYOND FREEDOM



JUST IMAGINE

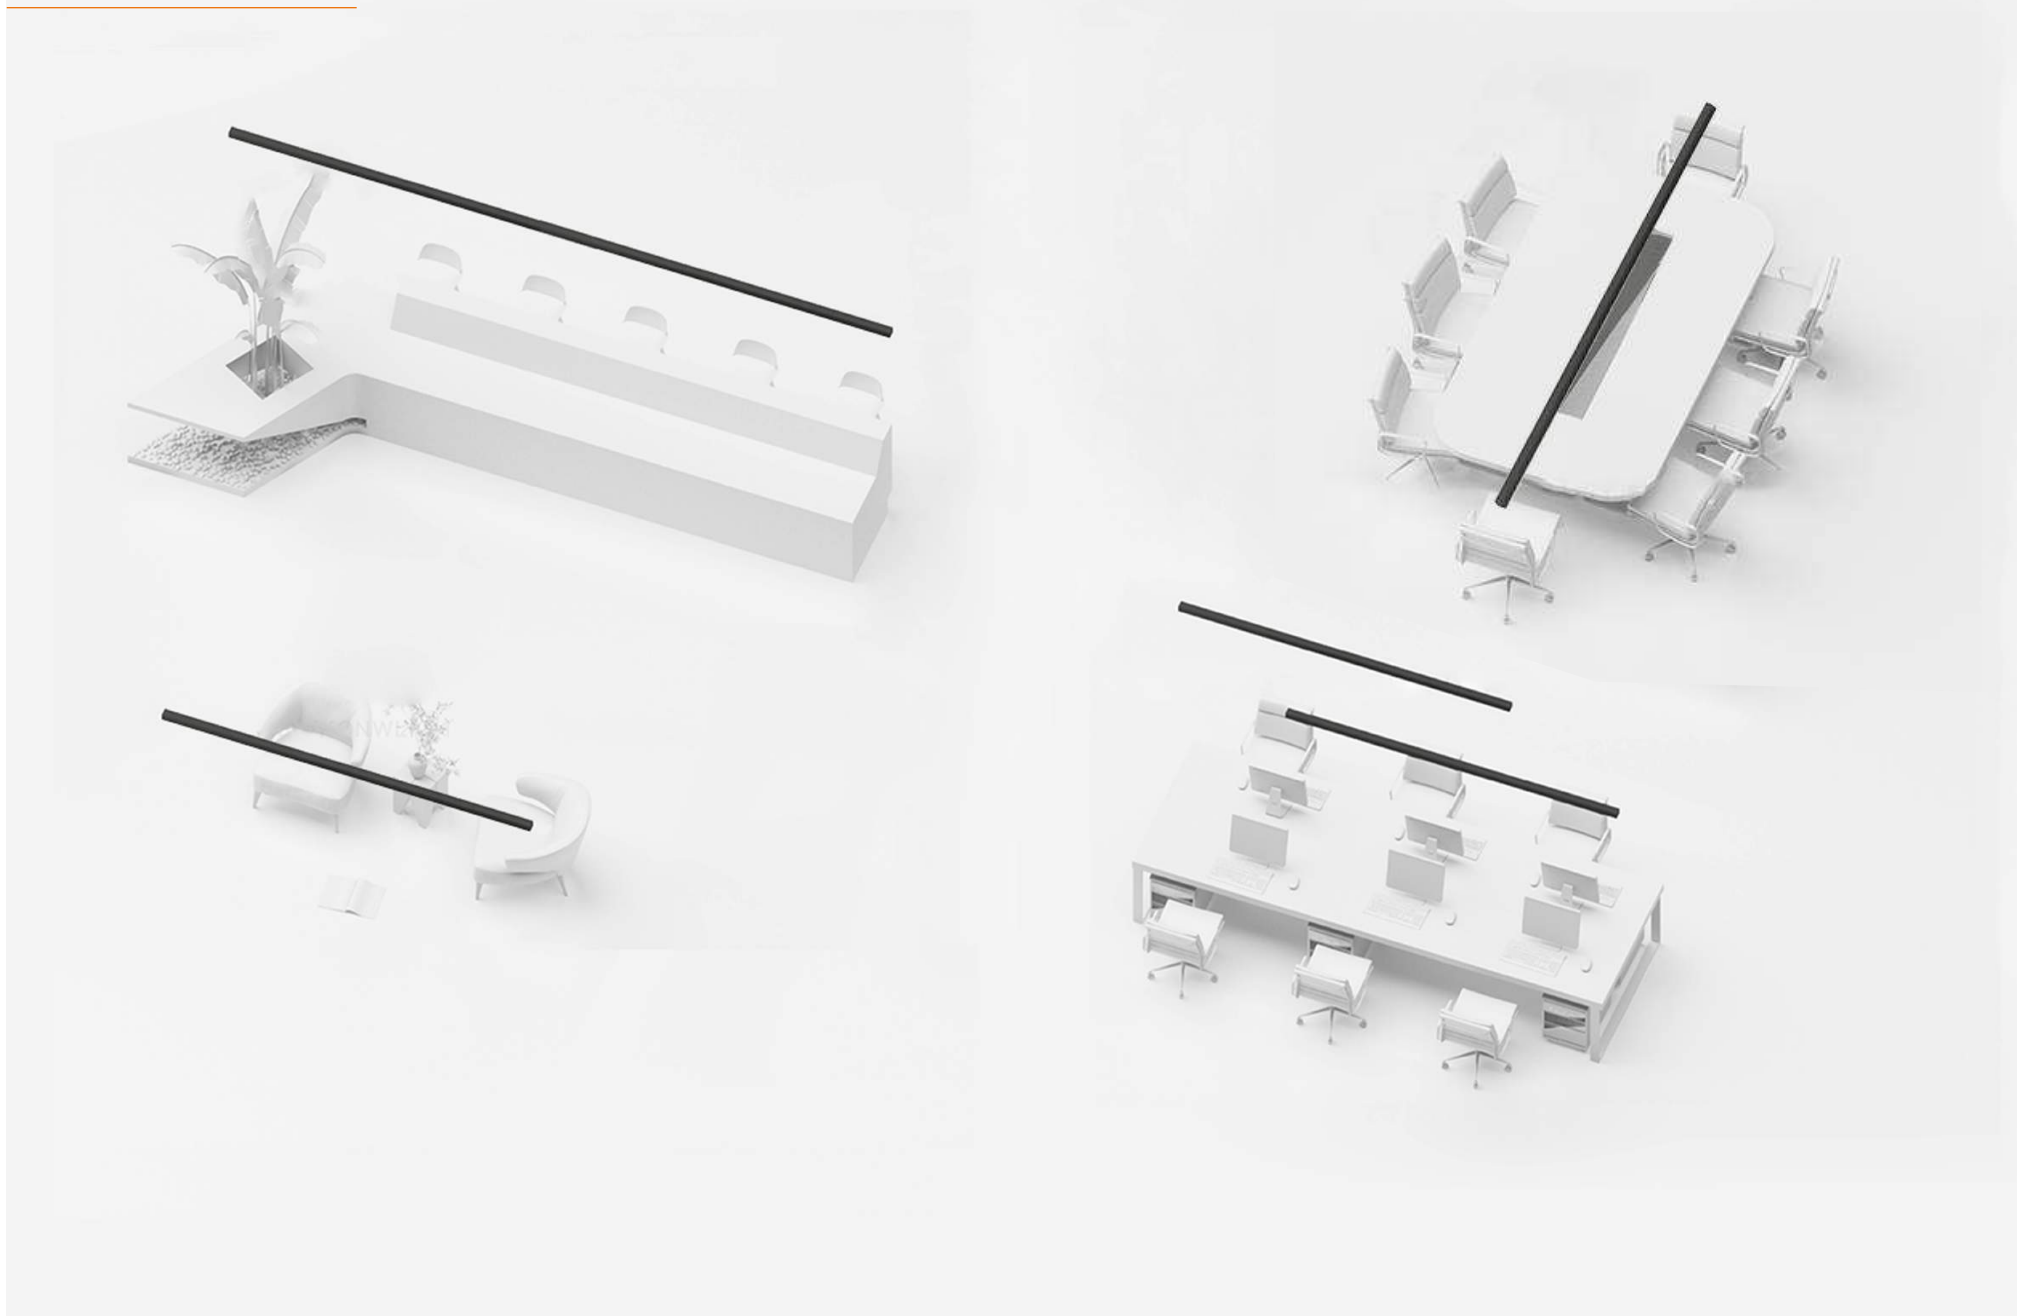


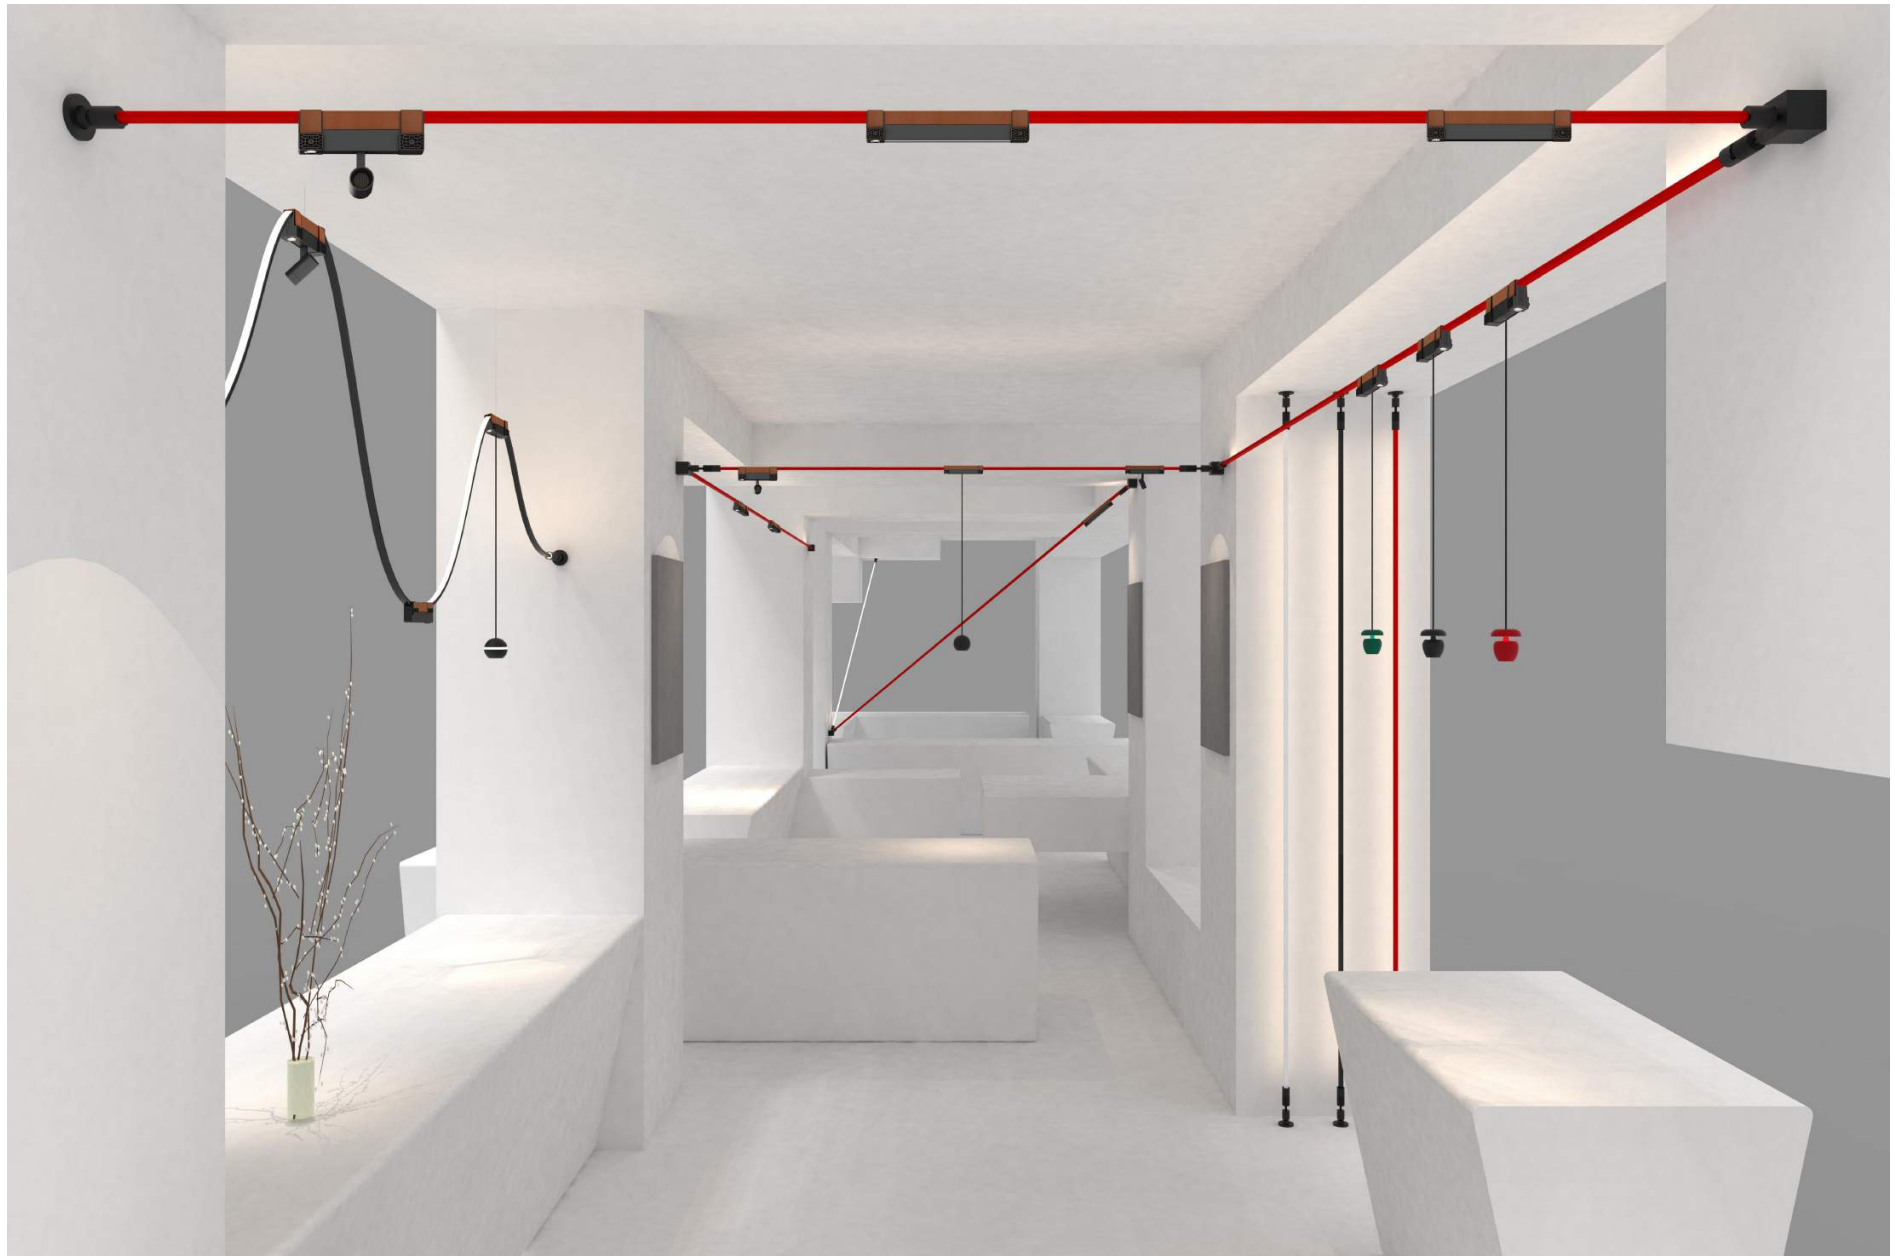



## 解决层高 实现多样化照明

线条纵横交错间，施展光影魔法  
赋予灵动美感

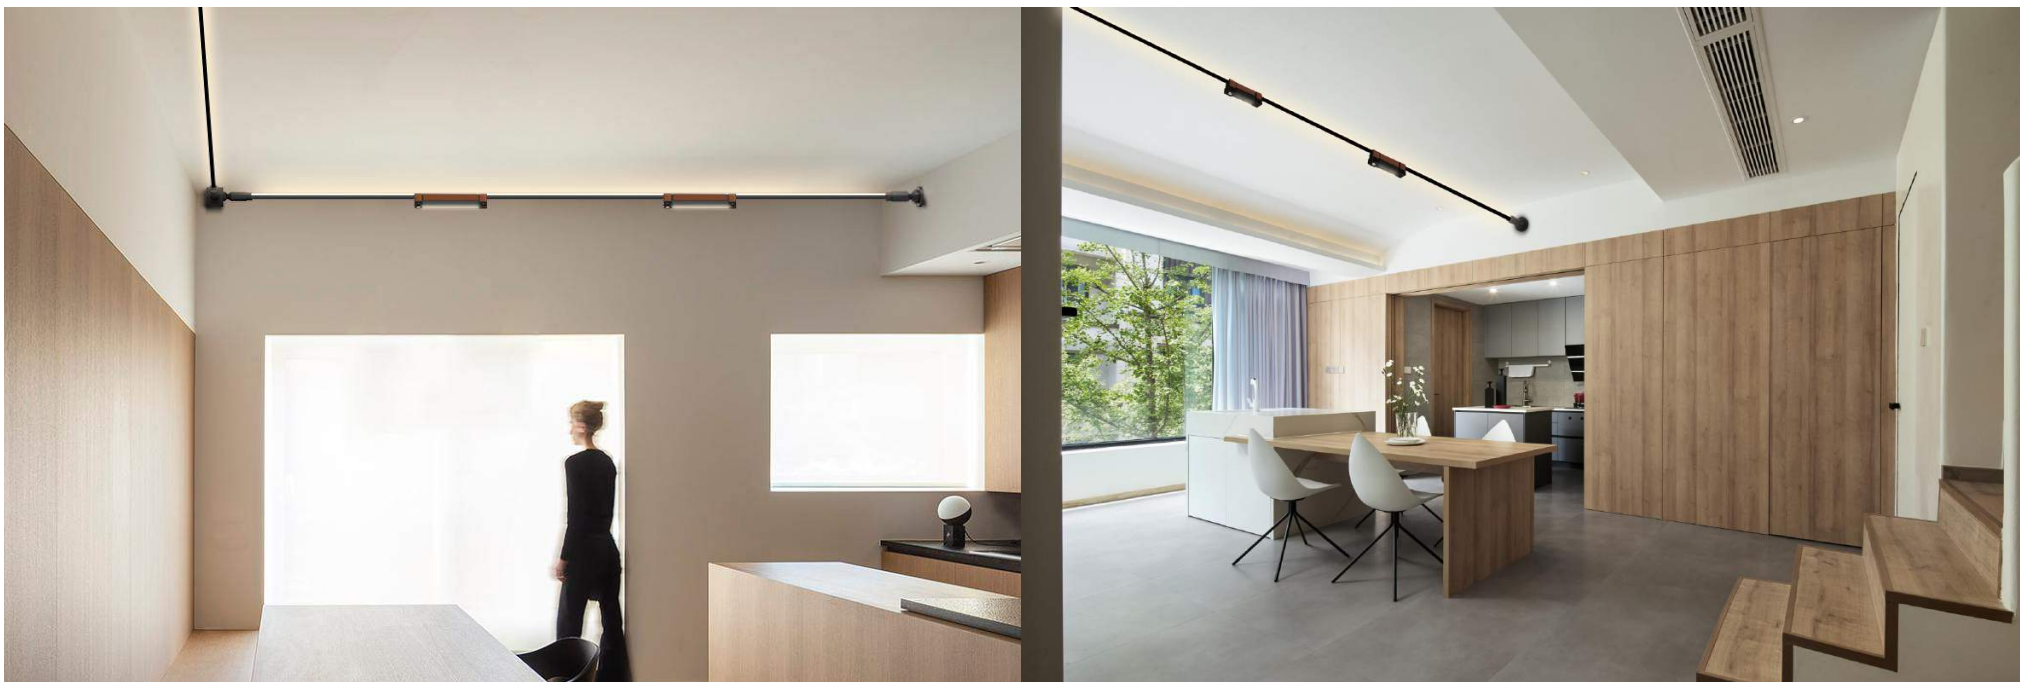

## 现代简洁线条之美

可以延伸出多种造型  
让光影演绎个性的艺术空间

## 为空间增添艺术感与高级感

灵动而轻盈的流线设计  
营造刚柔并济之美



## 赋予空间个性定义

简单的造型元素，魅力流线感灯光，  
呈现简约之美



## 举步之间 光明立现

设计源于生活的灵感  
精而简的灯光设计  
打造属于你的照明空间感





## 极简无主灯风格


干净的线条，简约的造型  
赋予空间无限变幻与想象

## 以『不繁』成就『不凡』


简洁的造型，利落的线条遵循“少即是多”的  
极简设计理念光影配合勾勒出空间的秩序与美感  
将北欧设计的简约之美展现得淋漓尽致




## 安装说明

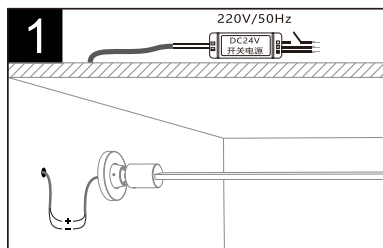


在安装位置预留供电线, 将供电线连接灯具, 接入DC24V电压, 打开电闸, 试亮, 确保电路畅通。

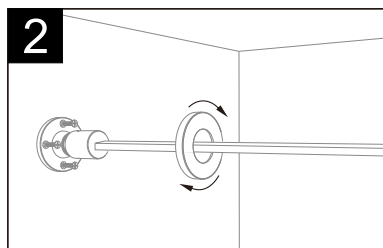

拧开端盖, 用配螺丝钉将灯具两端吸顶盘固定好。  
注意: 固定轨道两端时, 尽量拉直轨道。

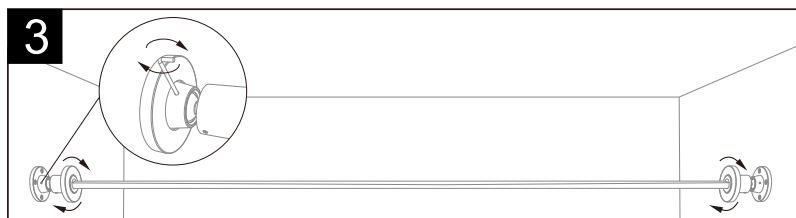

安装好轨道后, 将吸顶端盖拧回吸顶盘; 用六角匙拧紧吸顶盘上的机米螺丝, 将拉力头固定住。(这颗机米用于控制拉力头的调角, 安装前发现不能调角可松开机米螺丝)

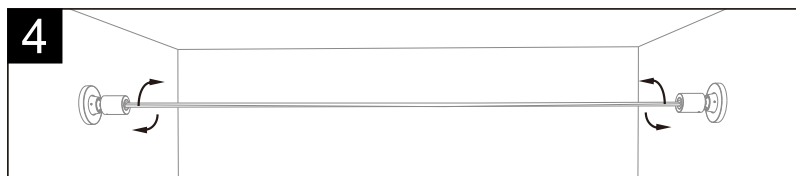

安装好轨道后用拉力头上的旋转件将轨道拉直, 旋转时候, 要握住轨道, 以免轨道同步旋转导致线路扭断(两端能把轨道拉长约40mm); 安装灯具 打开电闸, 亮灯试亮。  
注意: 旋转拉力头时, 保证轨道拉直后不要强行再拉, 以免把轨道内钢丝拉断。





